


## 4.6mm SPC Herringbone Flooring



novafloor



# High Performance Components

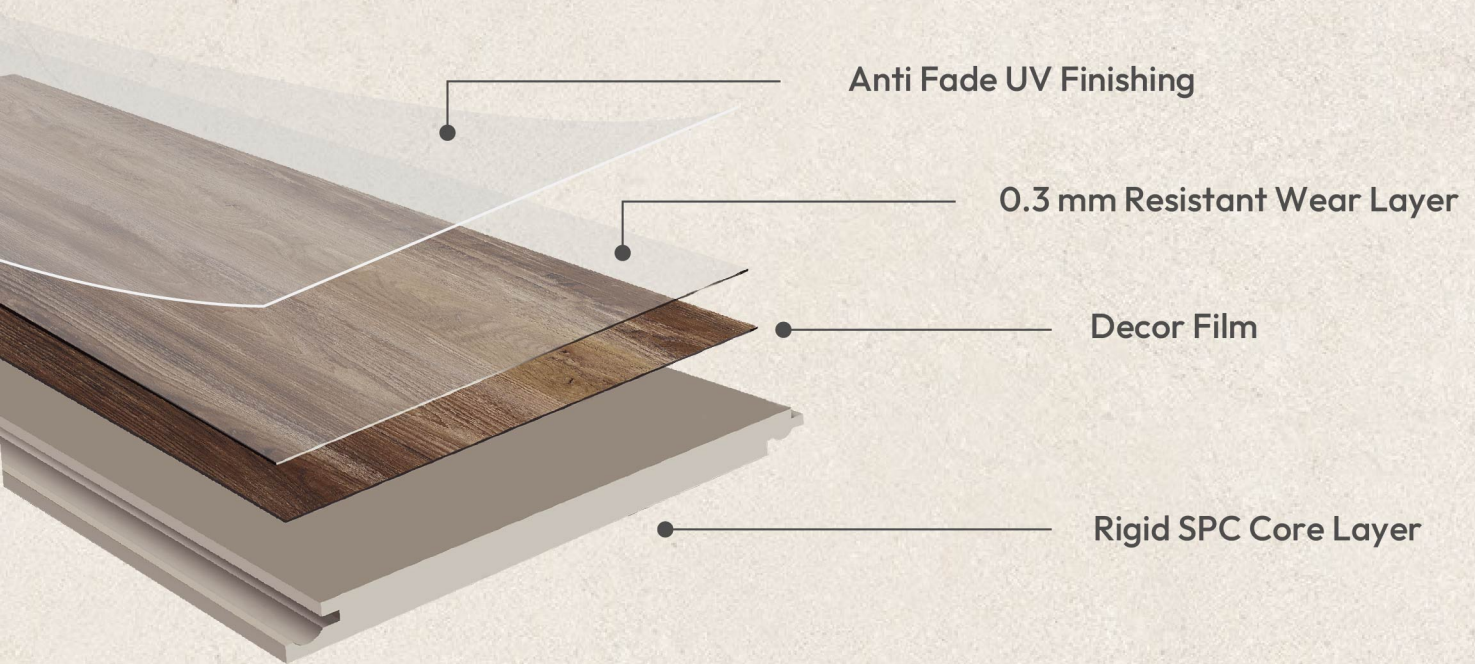

# Features of SPC Flooring

## Performance Highlights



Water  
Resistant



Termite  
Proof



Soundproof  
Flooring



Advanced Click  
Lock System



Low  
Maintenance



No  
Formaldehyde



Scratch  
Resistant



Fire  
Retardant



Pet  
Friendly



Environmental  
Protection

**100%**  
**VIRGIN**

Virgin  
Material

# Product Overview & Details

## Dimension

4.6 x 128 x 640 mm

## Wear Layer

0.3 mm

## Micro Bevel



## Packing

14.11 sqft / 16 pcs / ctn


## Surface

UV Coating

## Thickness

 4.6 mm

## Dimension

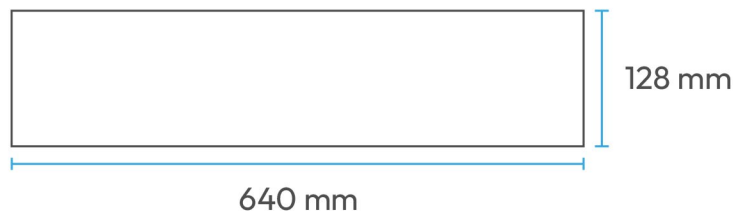

Terra Org Teak  
**NFS461H**



Terra Gran Oak  
**NFS462H**




Grey Rap Rovere  
**NFS463H**




Light Bavr Oak  
**NFS464H**



Terra Yok Teak  
**NFS465H**

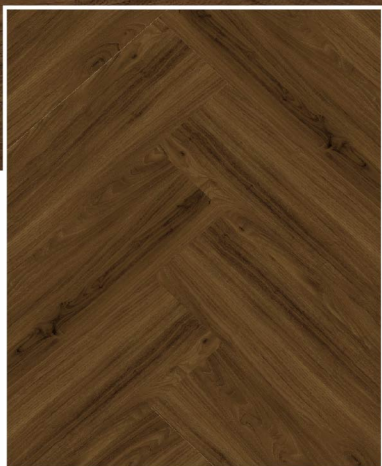


NFS461H

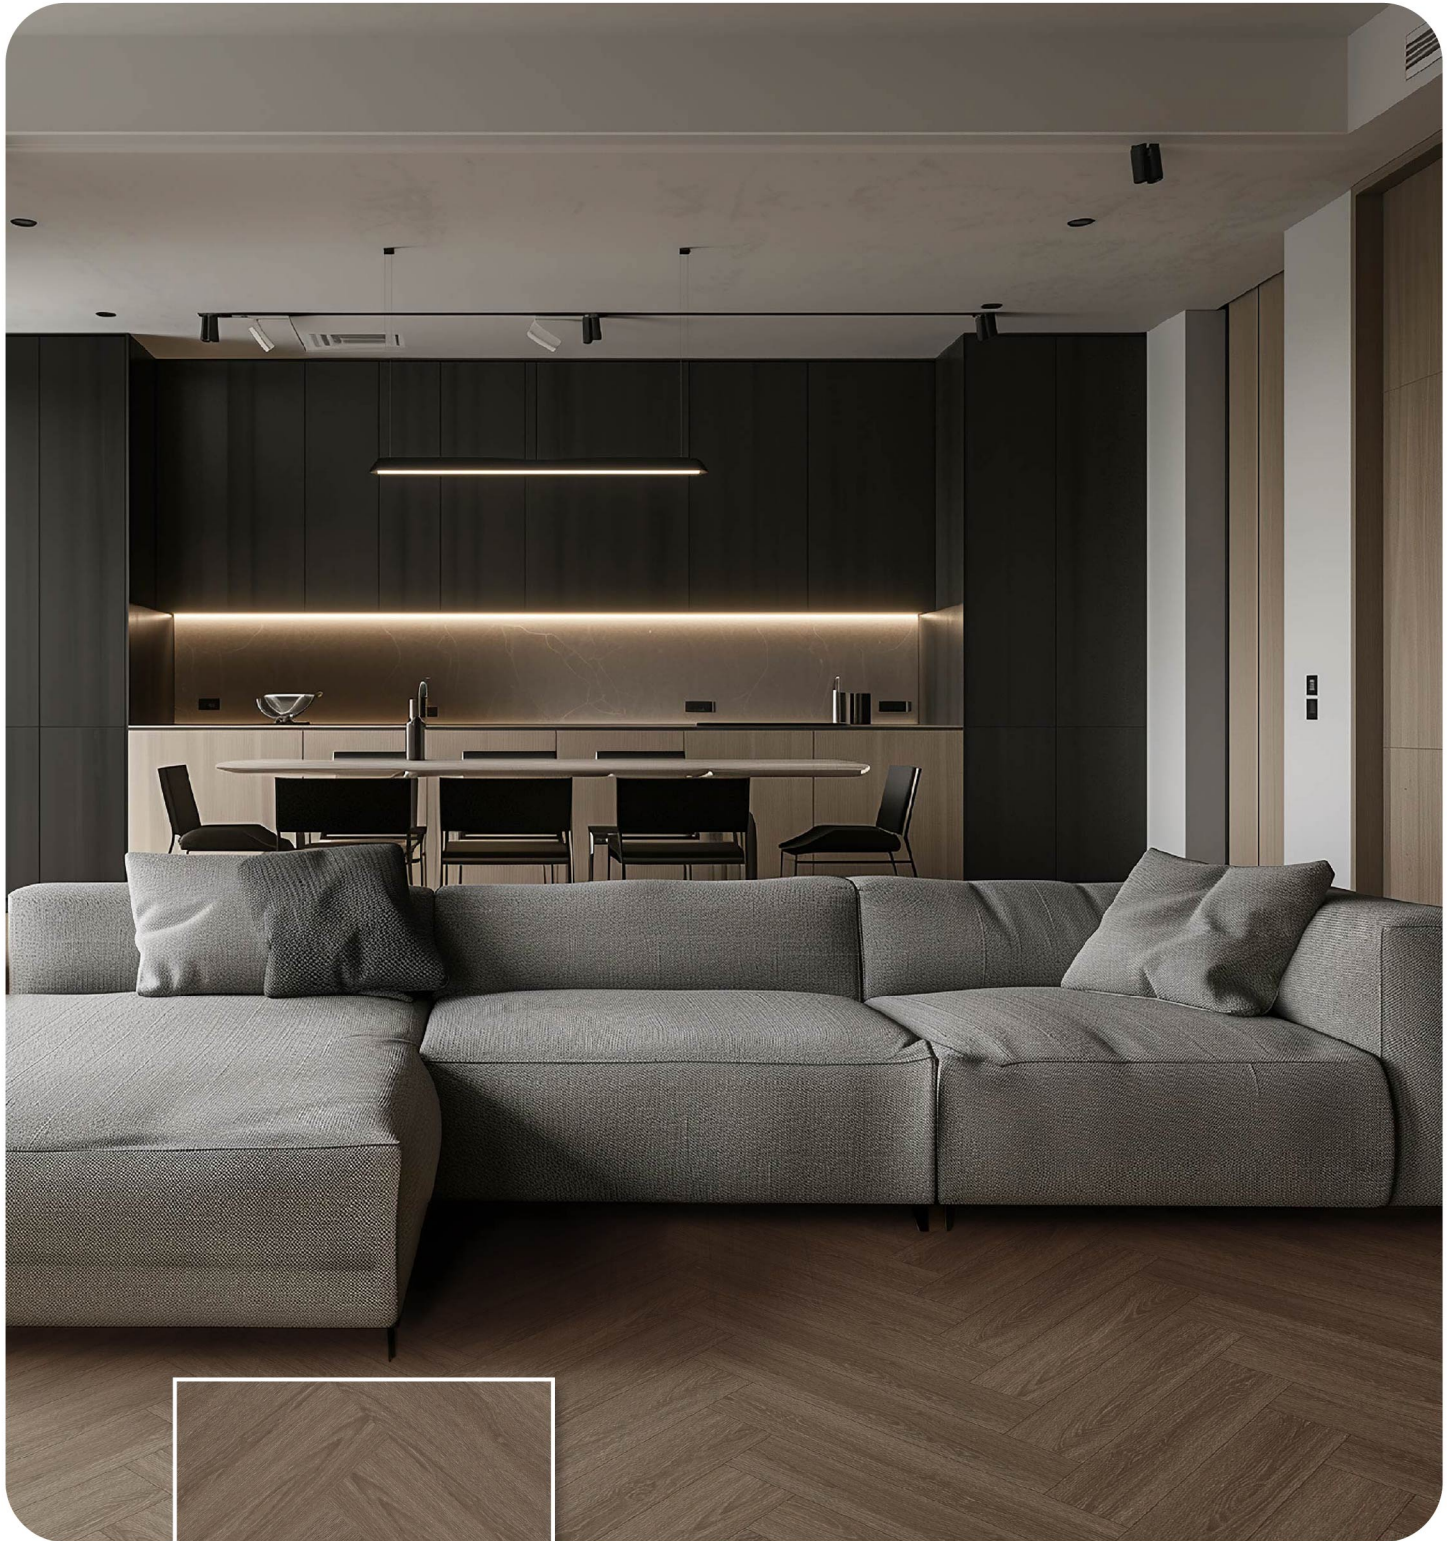

NFS462H



**NFS463H**

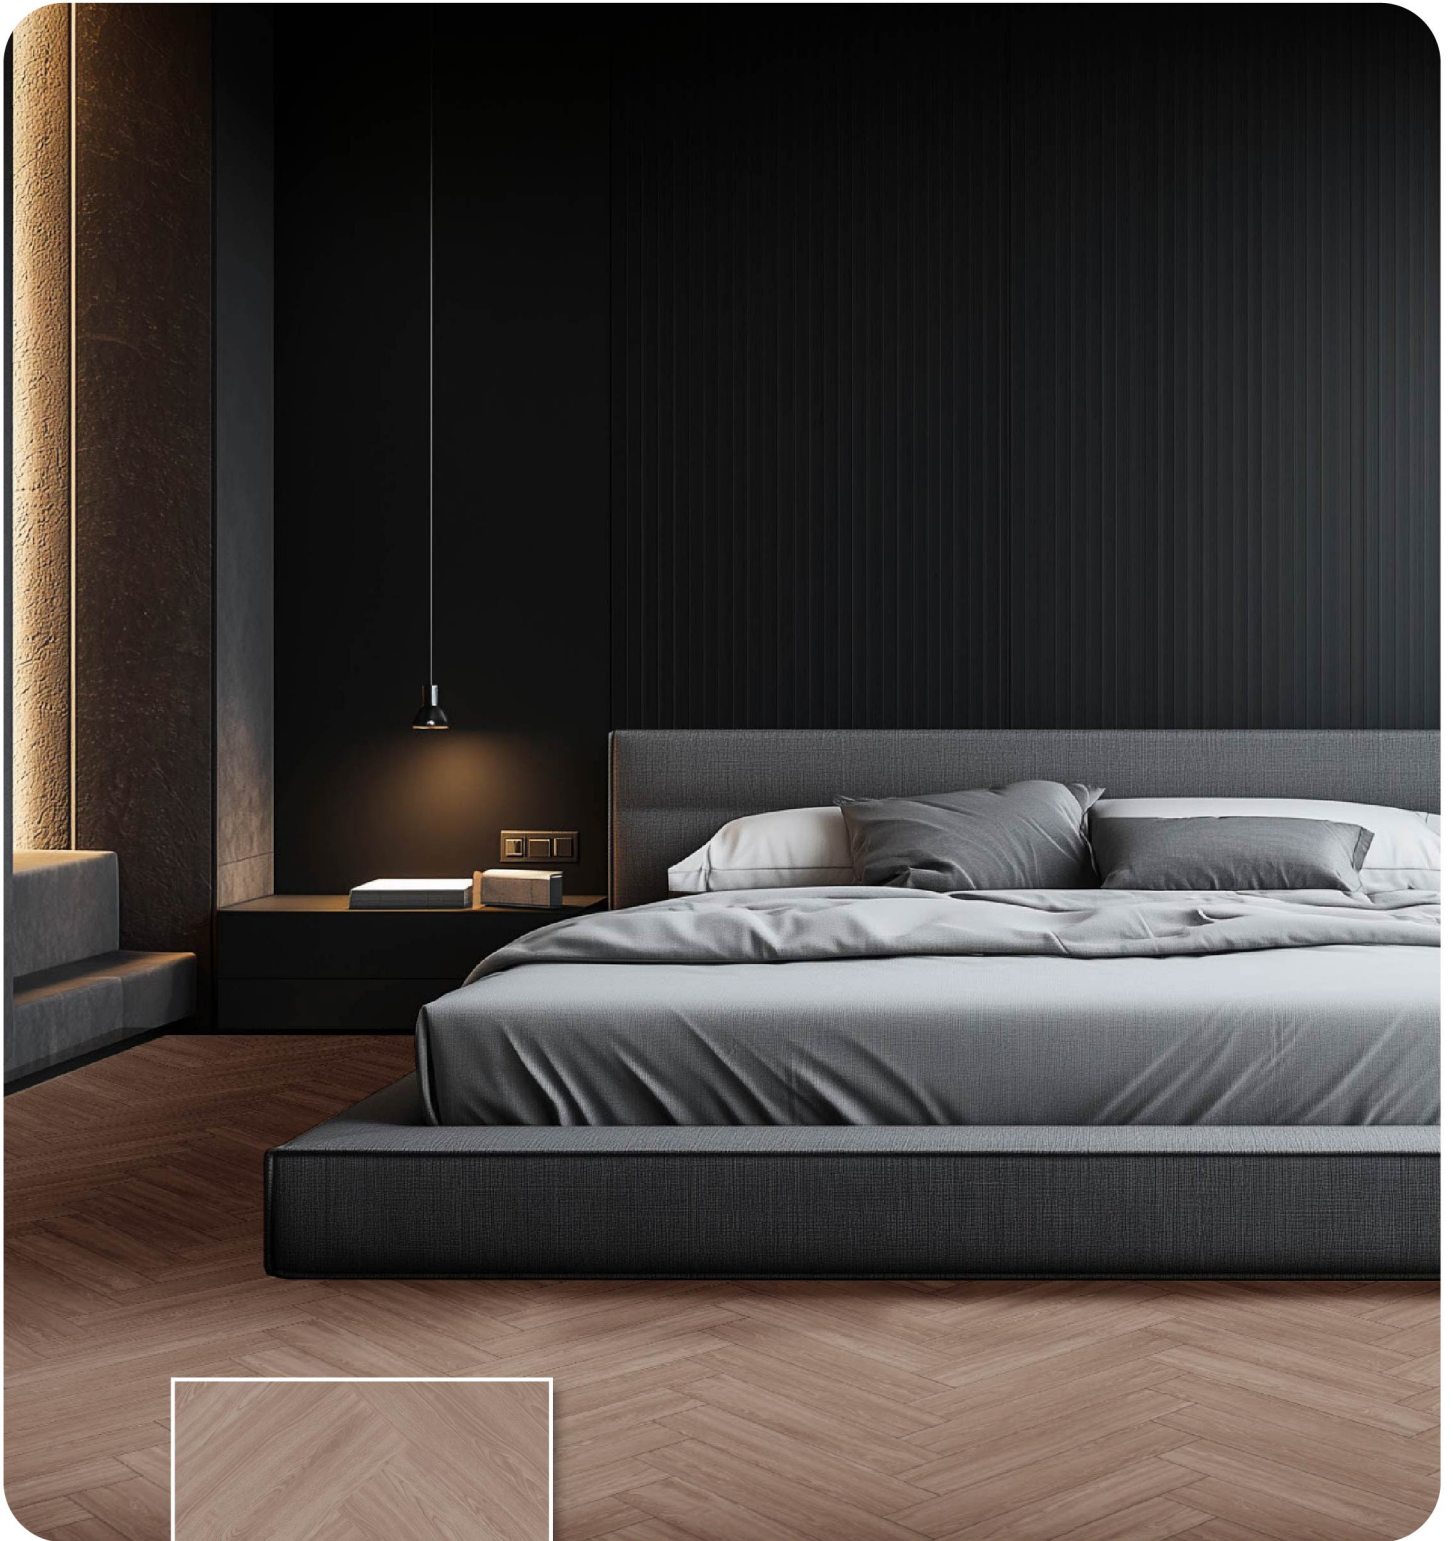

NFS464H



NFS465H

## Product Specification

**Dimensions:** 128 x 640 mm

**Thickness:** 4.6 mm

**Wear Layer:** 0.3 mm

**Packaging:** 16 pcs / 14.11 sqft

## Technical Features

Material	100% Virgin Material	
Surface Treatment	UV Coating (Two Coats)	
Click & Lock System	Unilin	
Packaging	14.11 sqft / 16 pcs per box	
Wear Resistant	Group T	
4 Side Edges	Micro Bevel	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	BIGBALL > 1000 mm
Reaction To Fire Behavior	ASTM E648 - 19a	CLASS 1
Slip Resistance	DIN 51130 - 2004	R10
Emission Of Formaldehyde	EN 717 - 2	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L
VOC Test	GB 18581 - 2020	PASS
Phthalate Test	EN 14372	PASS
Prohibited Heavy Metal	ICP - OES	PASS

## Product Specification

**Dimensions:** 128 x 640 mm

**Thickness:** 4.6 mm

**Wear Layer:** 0.3 mm

**Packaging:** 16 pcs / 14.11 sqft

## Technical Features

Material	100% Virgin Material	
Surface Treatment	UV Coating (Two Coats)	
Click & Lock System	Unilin	
Packaging	14.11 sqft / 16 pcs per box	
Wear Resistant	Group T	
4 Side Edges	Micro Bevel	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	BIGBALL > 1000 mm
Reaction To Fire Behavior	ASTM E648 - 19a	CLASS 1
Slip Resistance	DIN 51130 - 2004	R10
Emission Of Formaldehyde	EN 717 - 2	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L
VOC Test	GB 18581 - 2020	PASS
Phthalate Test	EN 14372	PASS
Prohibited Heavy Metal	ICP - OES	PASS