

5.0mm SPC Flooring


(Wood | EIR Wood | Chevron | Stone)



Superior Collection

High

Performance Components

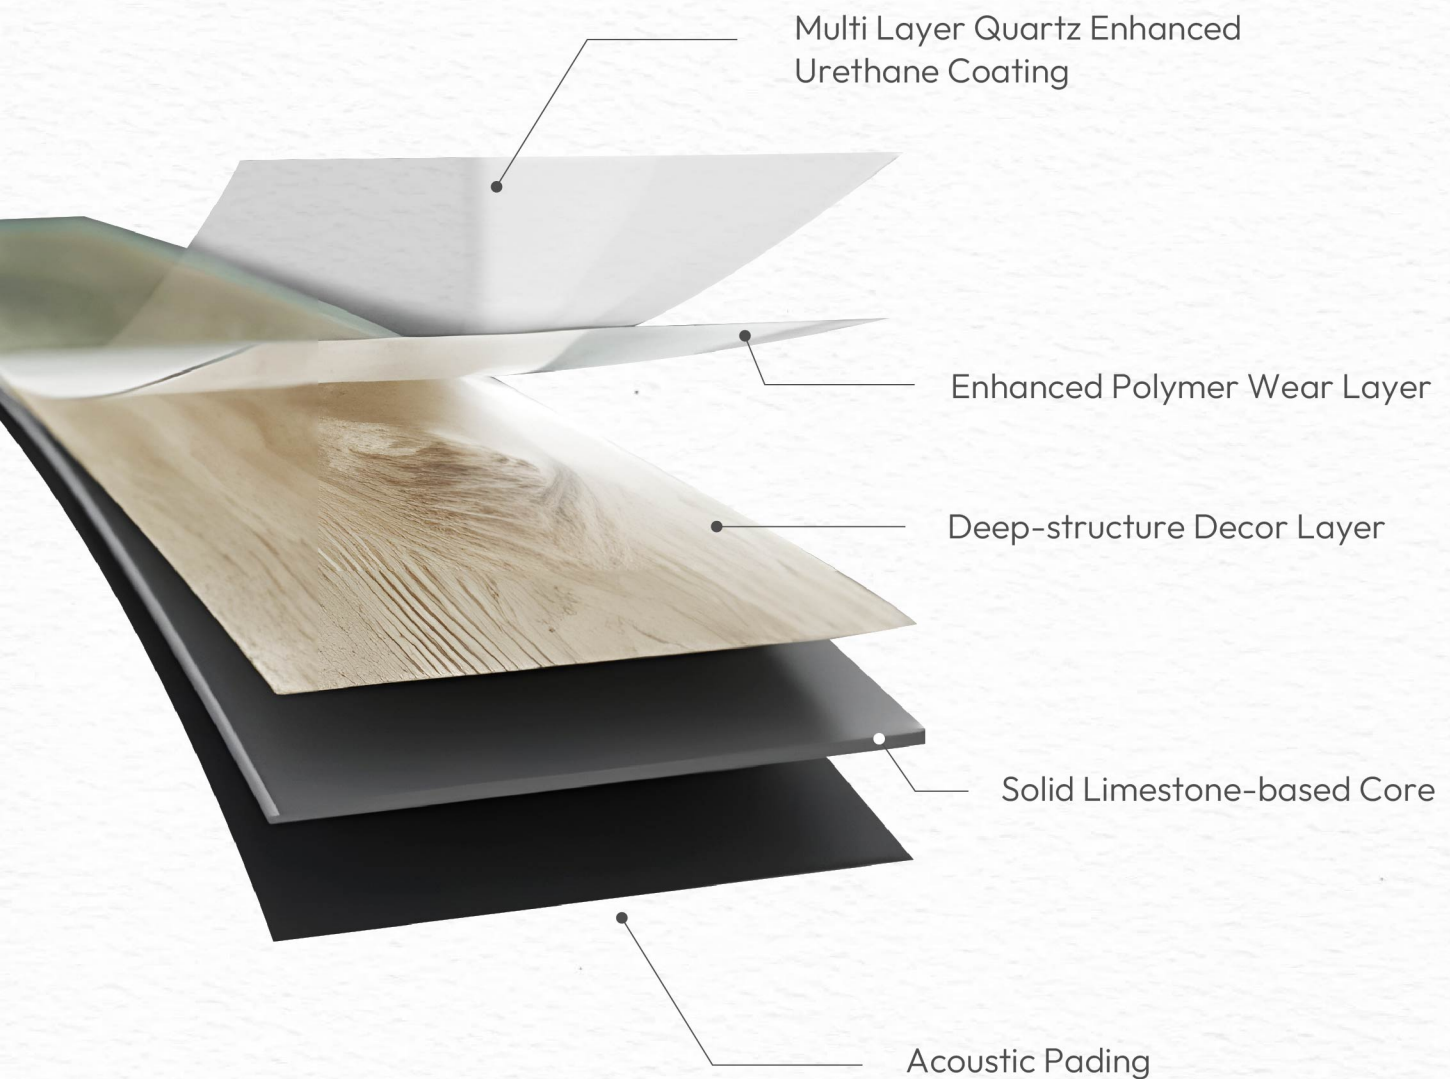

Features of SPC Flooring

Performance Highlights



Dry Back



Anti-Slip



Waterproof



Easy
To Clean



Environment
Friendly



Fire
Retardant

Advantage Specification



SVHC NOT
Chemically Toxic



Zero
Formaldehyde



Ultra-high
Elasticity



Smoke-burning
Resistance



Withstand
Voltage



Zero Dirt



Waterproof



Air Quality A+



Fine Embossing

Product Overview & Details

Wood

Dimension

5.0 x 183 x 1220 mm

Wear Layer

0.3 mm

Thickness

 5 mm


Packing

24.03 sqft / 10 pcs / ctn
24.2kg / ctn
55 ctns / pallet

Surface

Embossed

Dimension

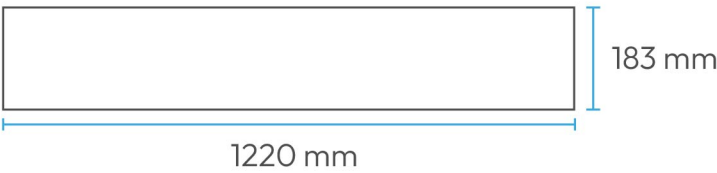

Cotton Oak
S101



Euro Oak
S103



American Oak
S104



Colden Teak
S105



Sienna Oak
S107



Coco Chestnut
S110



S114



S115



S116



Victorian Ash
S203



Silver Grey Oak
S206




Off-white Oak
S207



Cream Yellow Oak
S208



S101

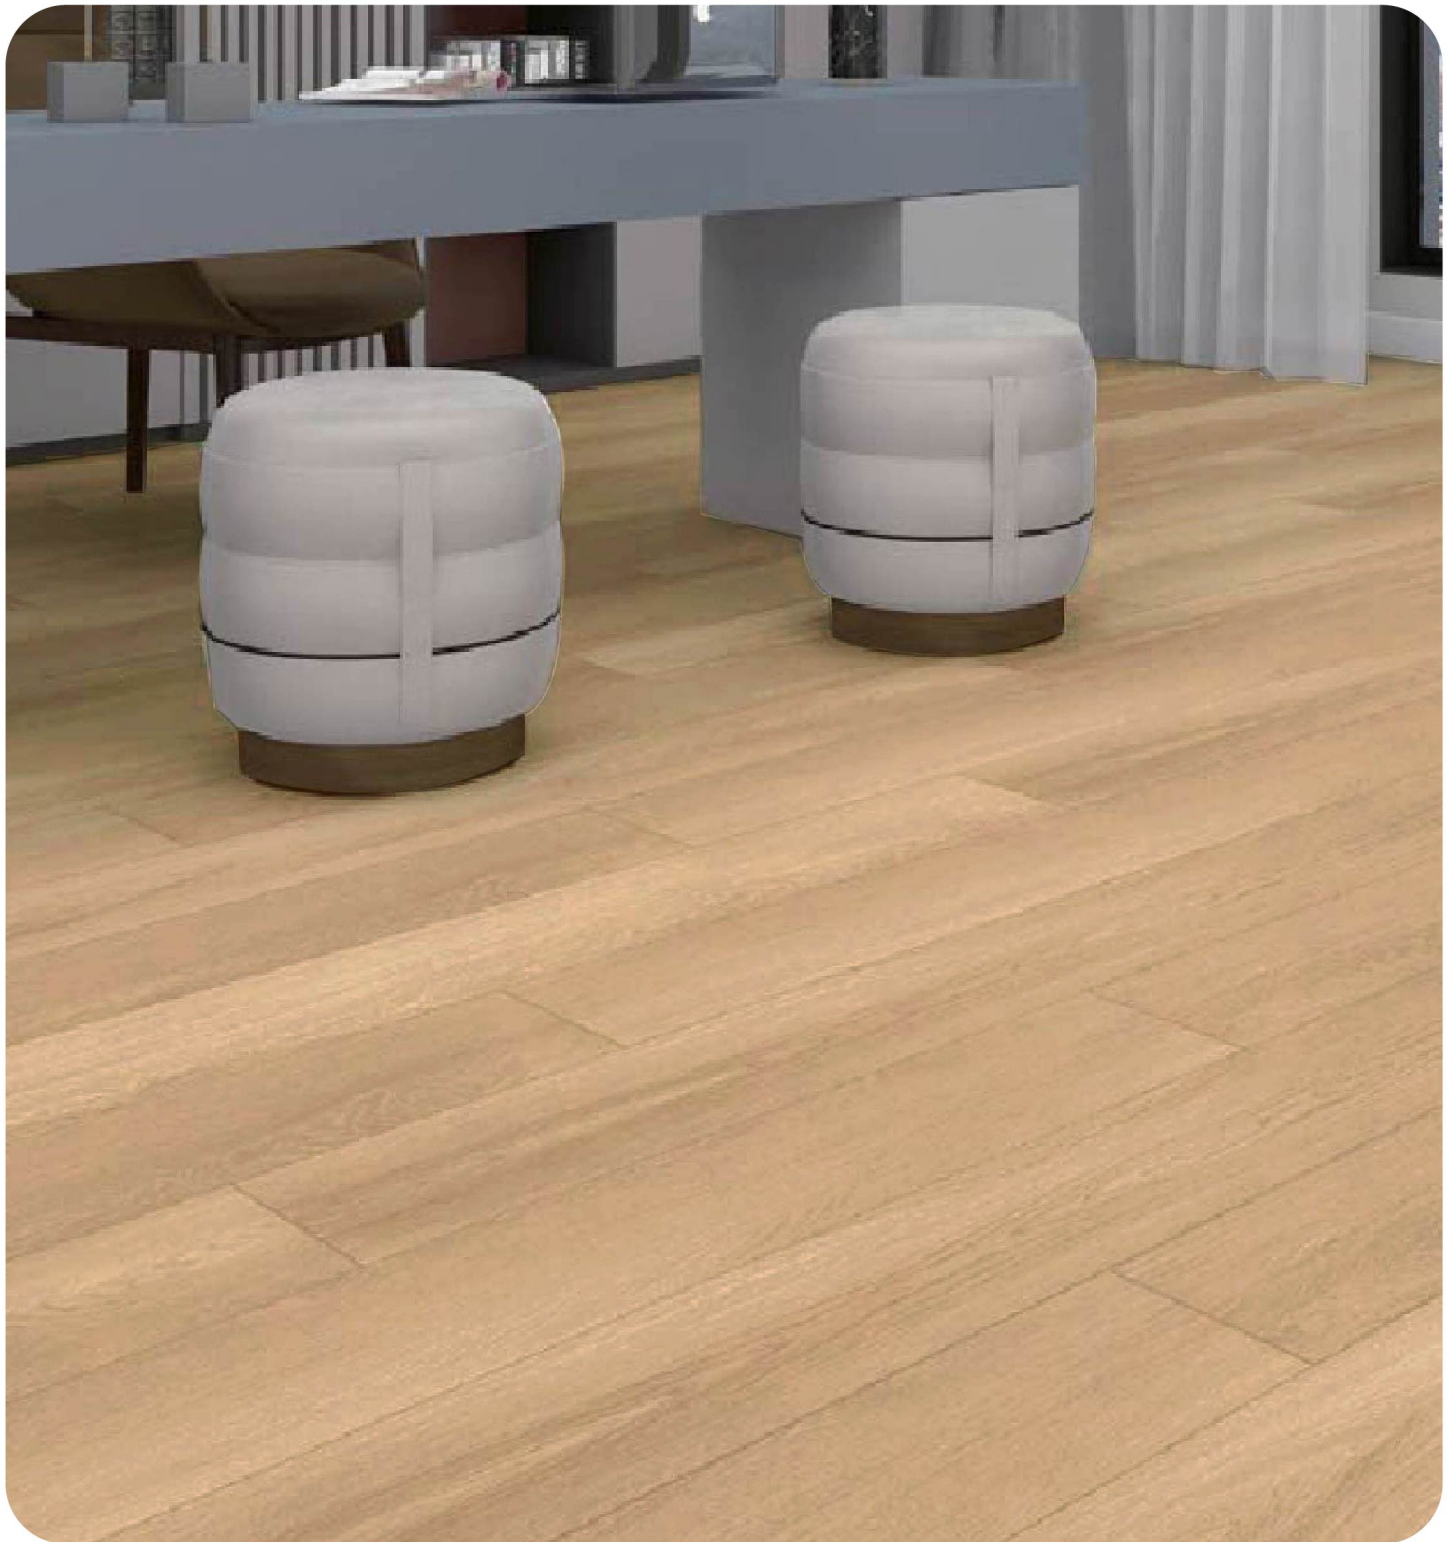

S103




S104



S105




S107

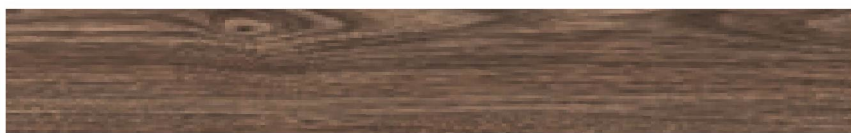

S110



S114

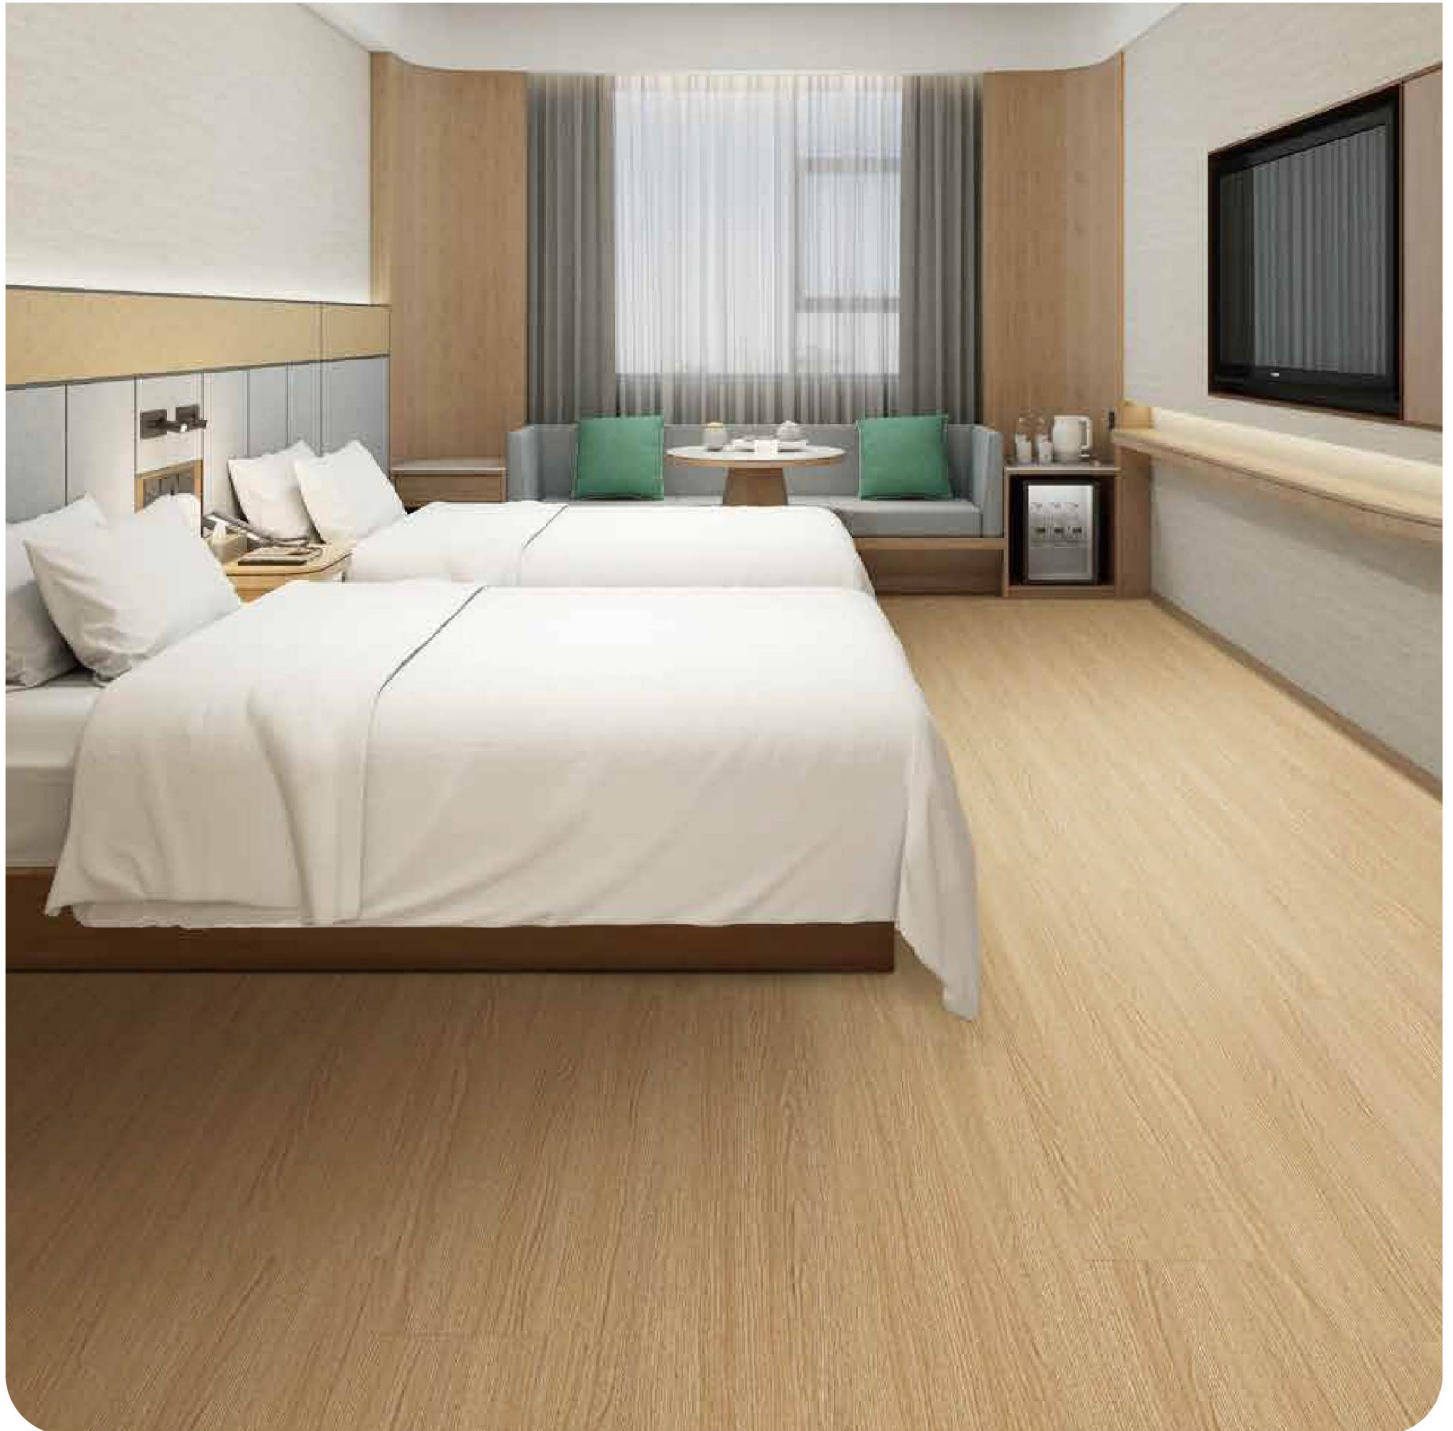

S115



S116



S203



S206



S207



S208

Product Overview & Details

EIR Wood

Dimension

5.0 x 180 x 1220 mm

Wear Layer

0.3 mm

Thickness

5 mm


Packing

23.64 sqft / 10 pcs / ctn
23.9 kg / ctn
55 ctns / pallet

Surface

EIR

Dimension

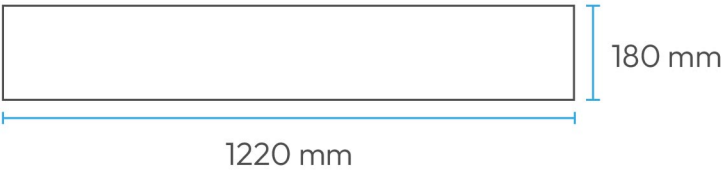

Europe Oak
SE112



Europe Oak
SE113



SE112



SE113

Product Overview & Details

Chevron

Dimension

5.0 x 310 x 950 mm

Wear Layer

0.3 mm

Thickness

5 mm


Packing

25.36 sqft / 8 pcs / ctn
24.7 kg / ctn
50 ctns / pallet

Surface

Embossed

Dimension

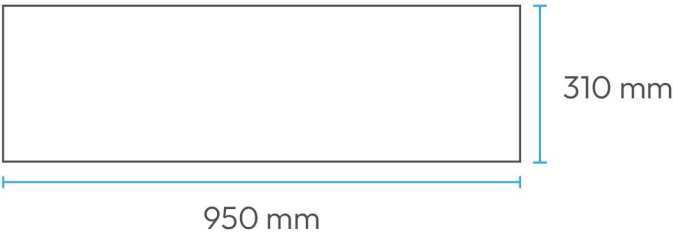

SH01



SH02



SH01




SH02

Product Overview & Details

Stone

Dimension 5.0 x 305 x 610 mm	Wear Layer 0.3 mm	Thickness 5 mm
Packing 20.03 sqft / 10 pcs / ctn 20.2 kg / ctn 66 ctns / pallet	Surface Embossed	

Dimension

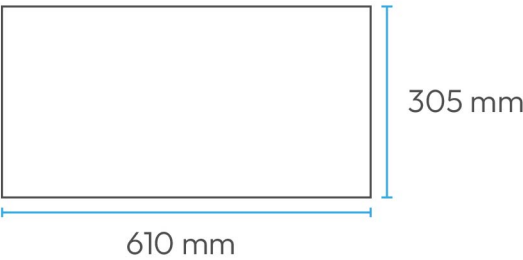

S301



S305



S301



S305

Technical Data. SPC 5.0

Dimension : 183 x 1220 mm (Wood) Thickness : 5 mm	Wear Layer : 0.3 mm Packing : 10 pcs / 24.03 sqft
Dimension : 180 x 1220 mm (EIR Wood) Thickness : 5 mm	Wear Layer : 0.3 mm Packing : 10 pcs / 23.64 sqft
Dimension : 310 x 950 mm (Chevron) Thickness : 5 mm	Wear Layer : 0.3 mm Packing : 8 pcs / 25.36 sqft
Dimension : 305 x 610 mm (Stone) Thickness : 5 mm	Wear Layer : 0.3 mm Packing : 10 pcs / 20.03 sqft

Characteristics	Standards	Result
Total mass per unit area	EN ISO 23997	9.75kg/m ²
Squareness	EN ISO 24342	≤0.15mm
Straightness	EN ISO 24342	≤0.15mm
Peel Strength	EN ISO 24345	≥5.0kgf/cm
Residual Indentation	EN ISO 24343-1	≤0.20mm
Dimensional stability after exposure to heat	EN ISO 23999	≤0.05%
Initial curling	EN ISO 23999	-1.0mm≤n≤0.5mm
Curling after exposure to heat	EN ISO 23999	-1.0mm≤n≤0.5mm
Tension Strength	Internal	≥25kgf/5cm
Resistance to chemicals	EN ISO 26897	Pass
Colour fastness to light	EN ISO 105-B02	≥6
Wear Resistance	EN660-2	Pass
Toxic	EN71-3	ND
Fire Classification	EN13501-1 GB8624	Bfl-S1 B1
Slip Resistance	EN13893 DIN51130	D ≥R9
Usage Classification	EN ISO 10874	23,33,42
Impact Sound Reduction	ISO 10140-3 ISO717-2	21db

