

6mm SPC Flooring




novafloor



High Performance Components

CyberSPC flooring provides exceptional dimensional stability and superior performance

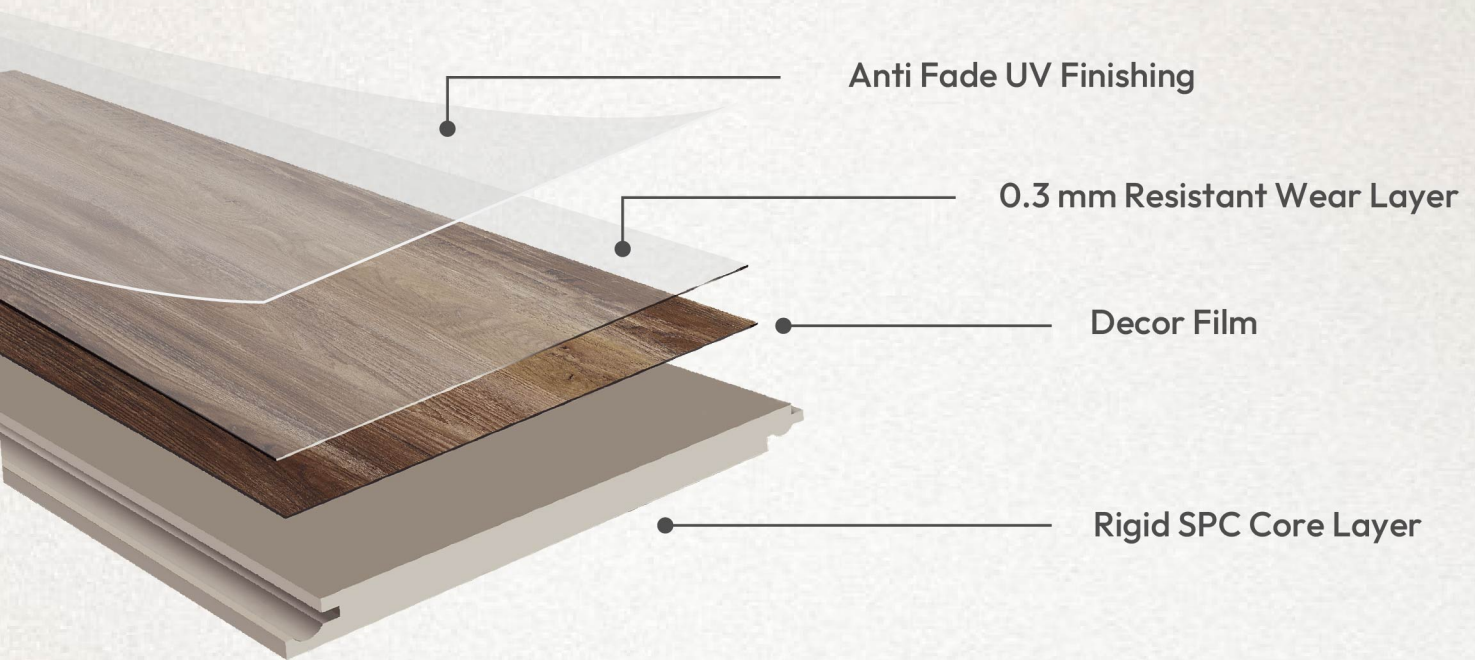

Certified by:



Features of SPC Flooring

Performance Highlights



Water
Resistant



Termite
Proof



Soundproof
Flooring



Advanced Click
Lock System



Low
Maintenance



No
Formaldehyde



Scratch
Resistant



Fire
Retardant



Pet
Friendly



Environmental
Protection

100%
VIRGIN

Virgin
Material

Product Overview & Details

Dimension

6 x 184 x 1220 mm

Wear Layer

0.3 mm

Micro Bevel



Packing

19.33 sqft / 8 pcs / ctn


24 kg / ctn

75 ctns / pallet

Texture

Embossed

Thickness



Dimesion



Light Finc Ash
NFS601



Light Dipp Nogal
NFS602



Terra Wla Elm
NFS603



Terra Rave Teak
NFS604



Terra Lark Beech
NFS605



Dark Falc Oak
NFS606



Dark Wren Walnut
NFS607



Grey Gull Rovere
NFS608




Grey Avo Oak
NFS609



Grey Greb Noce
NFS610

Accessories

6mm Flush Nosing

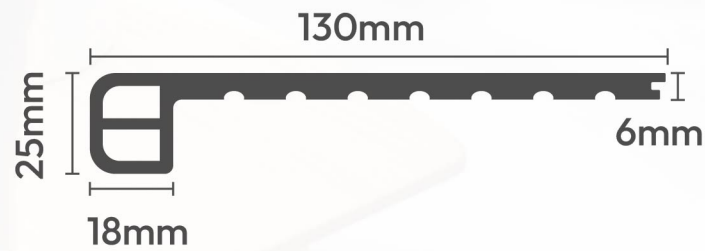

FN6

Dimension: 130 x 25 x 2400mm



FN601
Light Finc Ash



FN602
Light Dipp Nogal



FN603
Terra Wla Elm



FN604
Terra Rave Teak



FN605
Terra Lark Beech



FN606
Dark Falc Oak



FN607
Dark Wren Walnut




FN608
Grey Gull Rovere




FN609
Grey Avo Oak




FN610
Grey Greb Noce

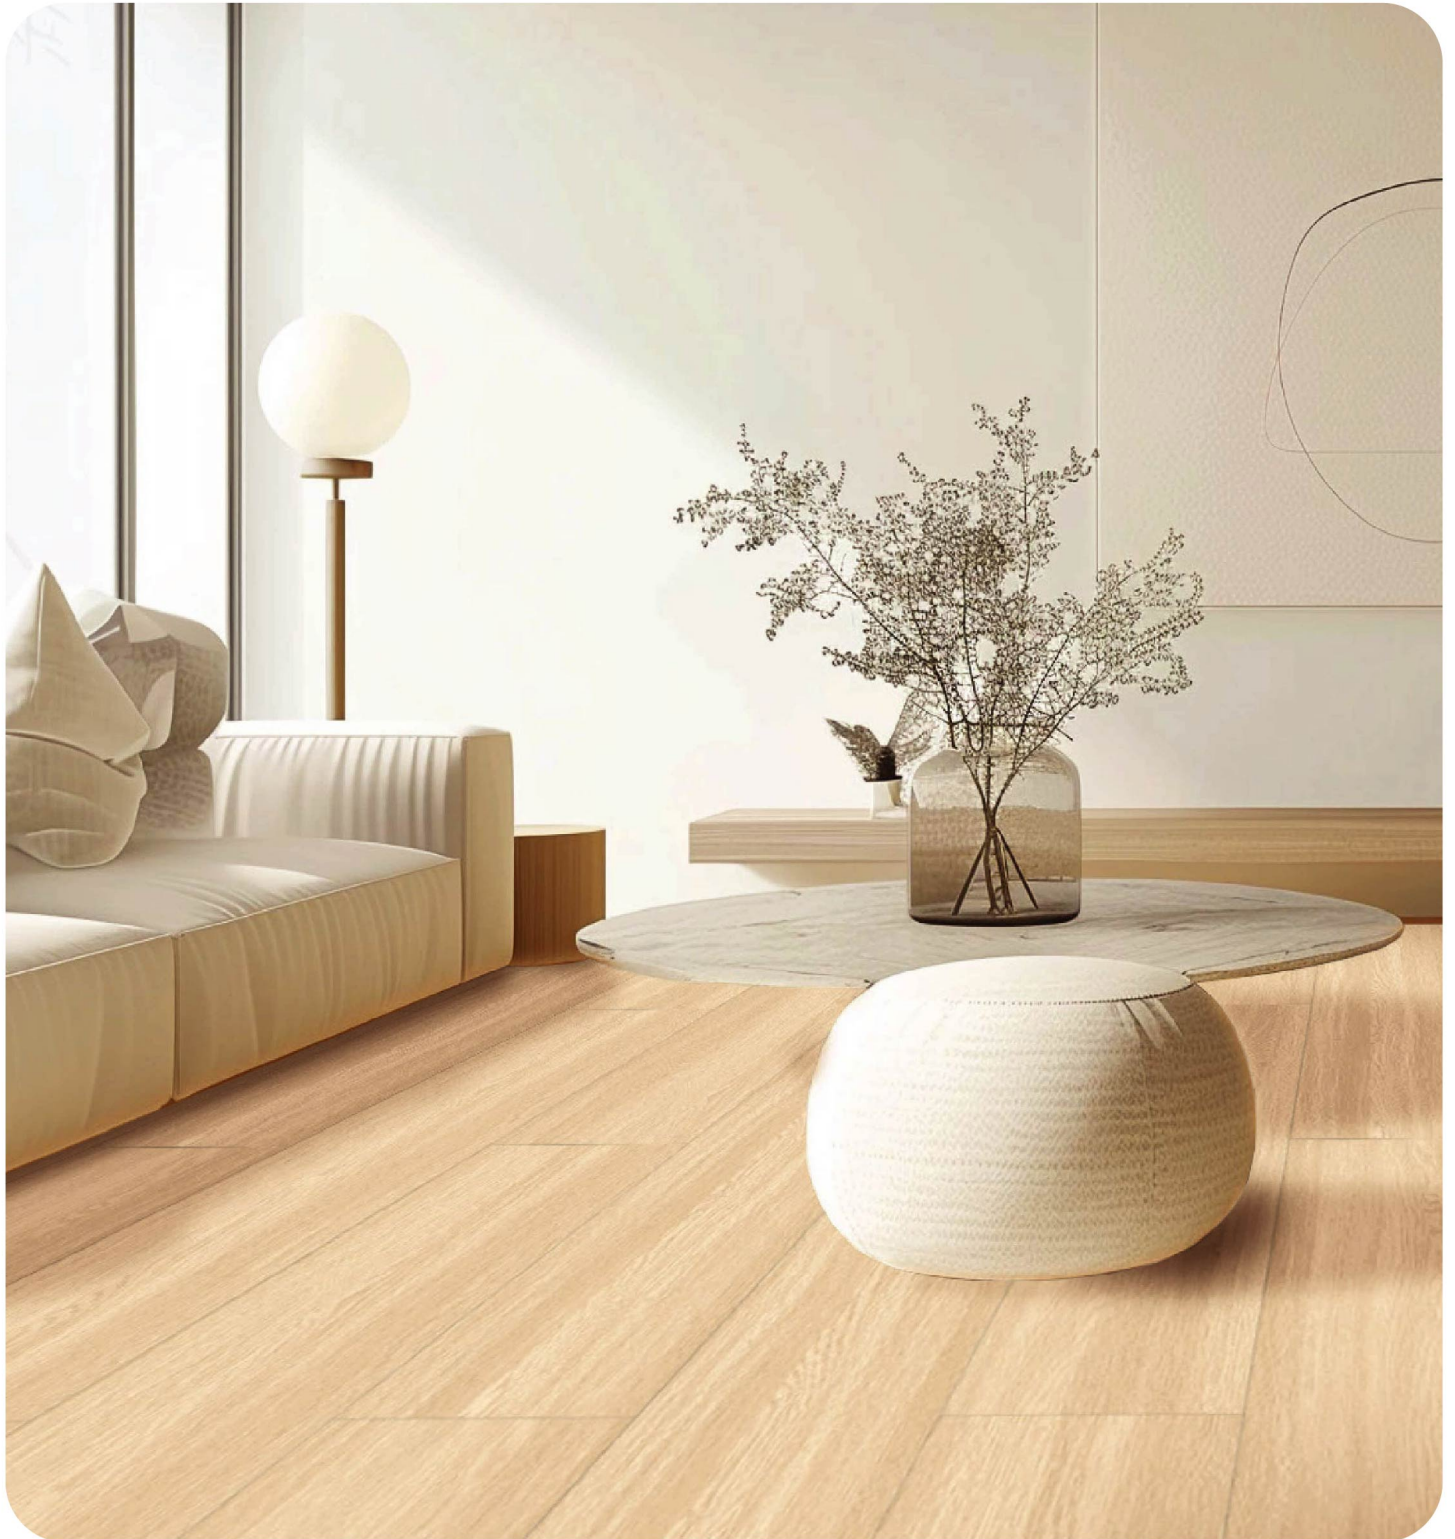

NFS601

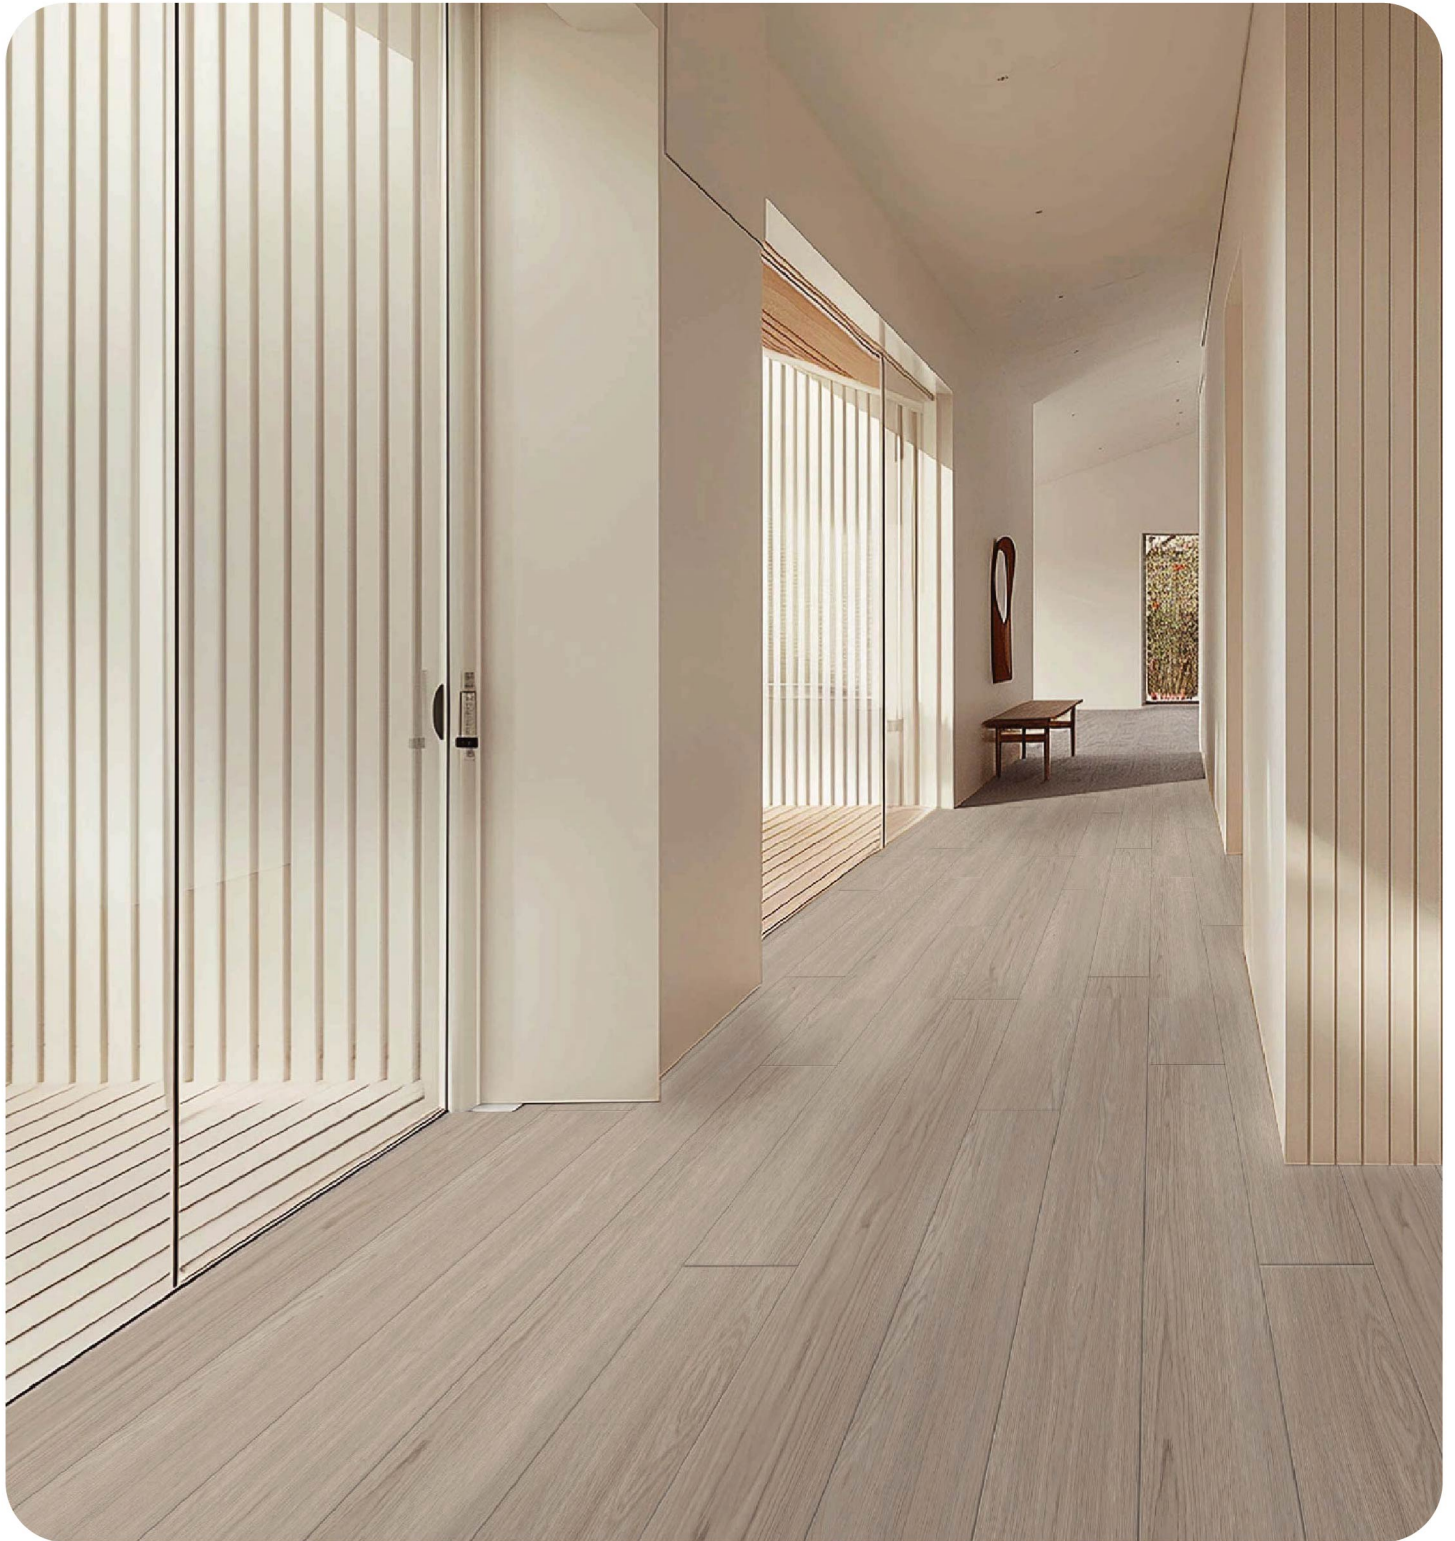


NFS602

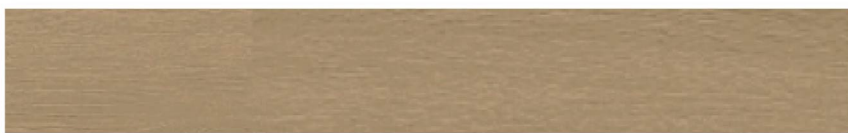

NFS603




NFS604

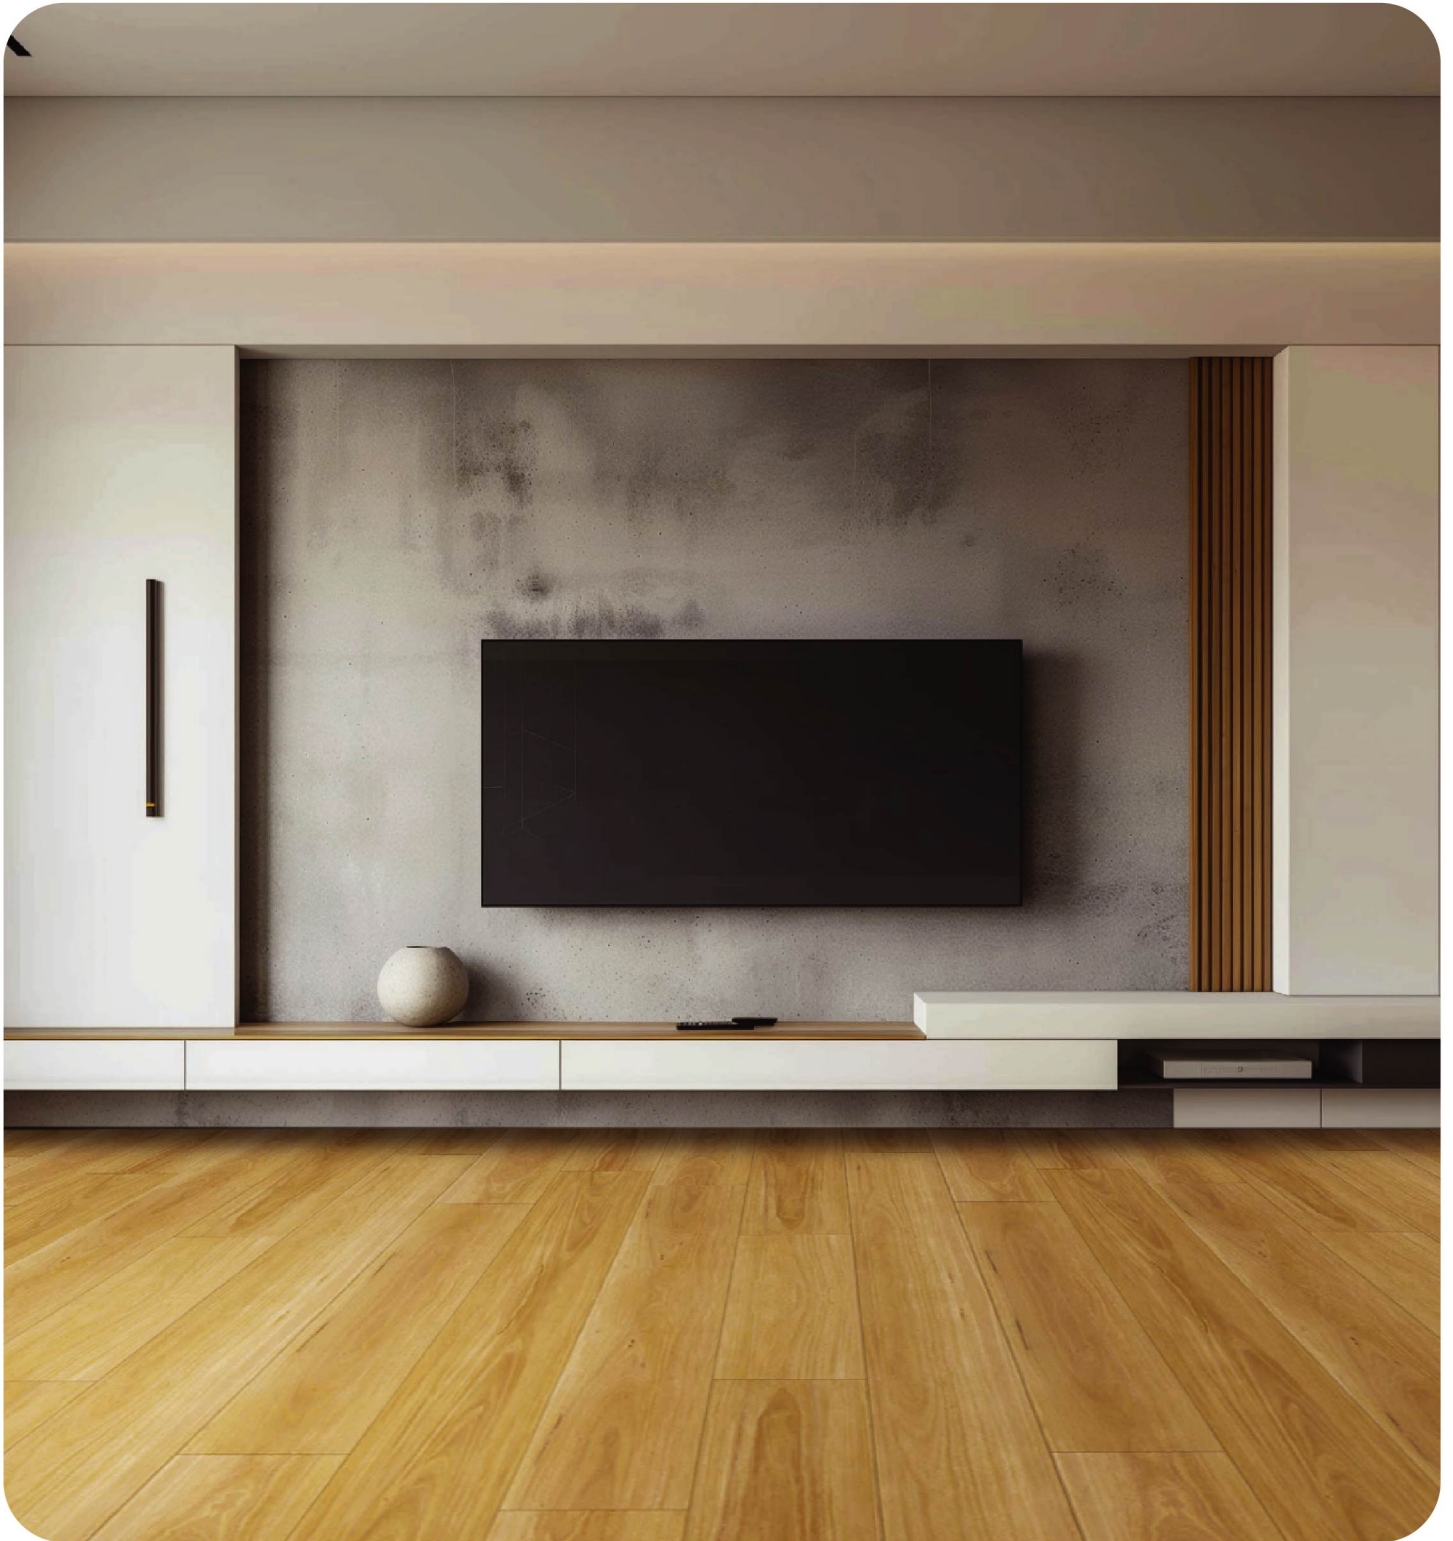

NFS605



NFS606

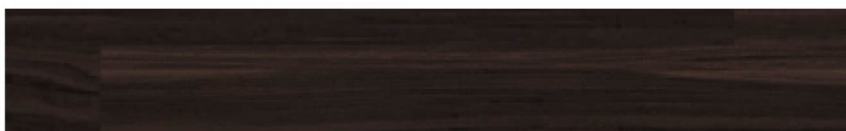

NFS607



NFS608



NFS609



NFS610

Product Specification

Dimensions : 184 x 1220 mm

Thickness : 6 mm

Wear Layer : 0.3 mm

Packaging : 8 pcs / 19.4 sqft

Technical Features

Material	100% Virgin Material	
Size	184 mm x 1220 mm	
Thickness	6mm	
Wear Layer	0.3 mm	
Surface Treatment	UV Coating (Two Coats)	
Click & Lock System	Unilin	
Packaging	19.33 sqft / 8 pcs per box	
Wear Resistant	Group T	
4 Side Edges	Micro Bevel	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	BIGBALL > 1000 mm
Reaction To Fire Behavior	ASTM E648 - 19a	CLASS 1
Slip Resistance	DIN 51130 - 2004	R10
Emission Of Formaldehyde	EN 717 - 2	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L
VOC Test	GB 18581 - 2020	PASS
Phthalate Test	EN 14372	PASS
Prohibited Heavy Metal	ICP - OES	PASS