


10mm CDF Wood Flooring



Mitologia Collection

High

Performance Components

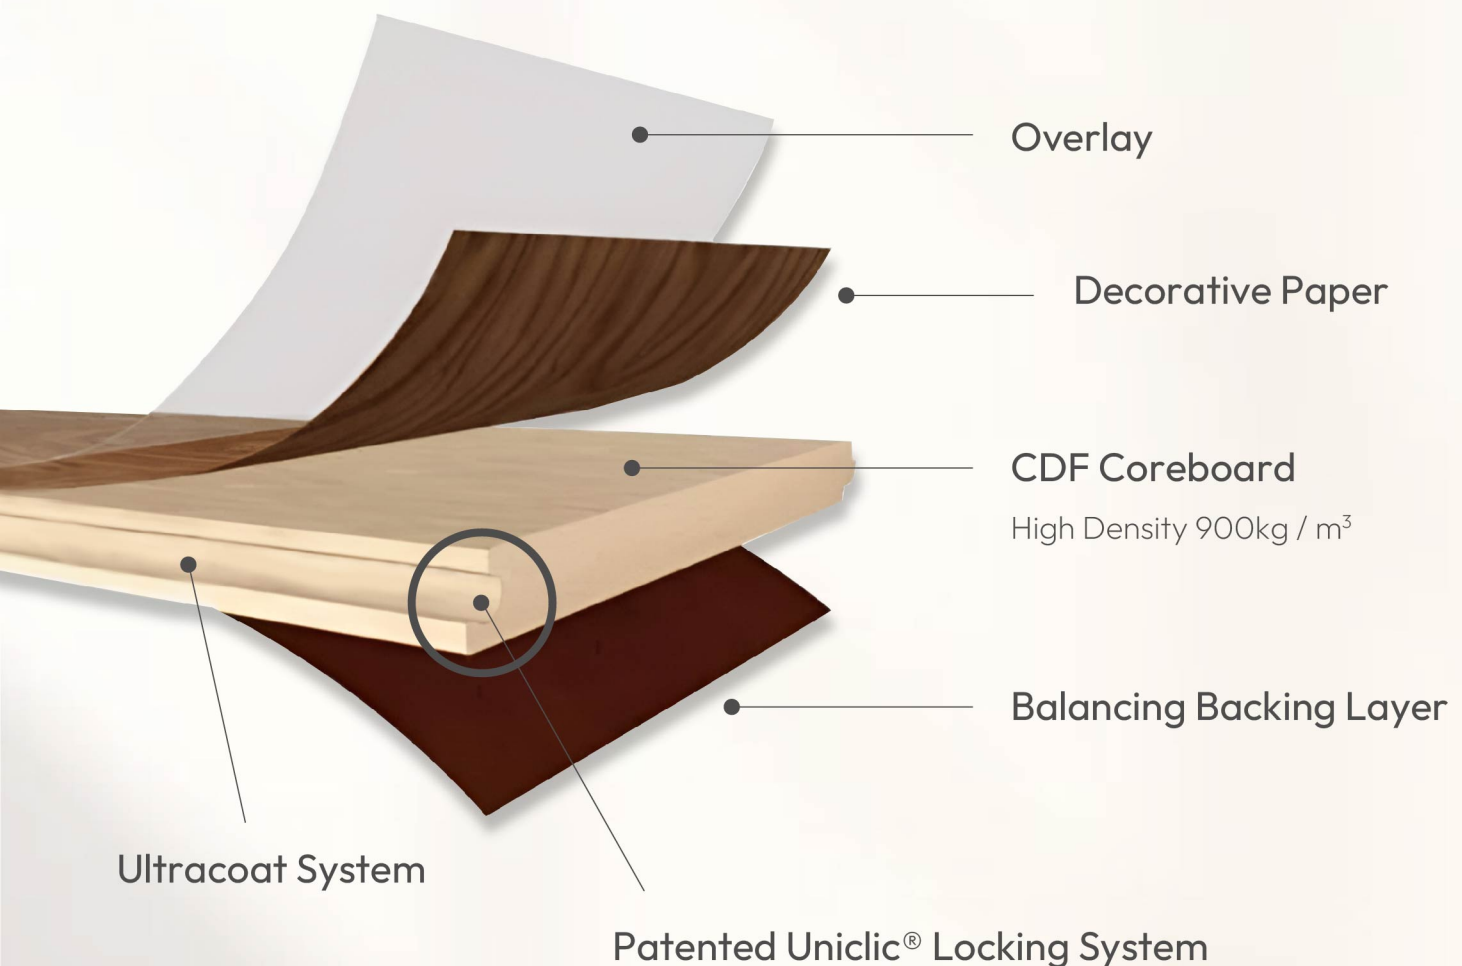

Feautres of CDF Flooring

Performance Highlights



Termite
Resistant



Stain
Resistant



Fade
Resistant



Scratch
Resistant



Uniclic[®]
Locking System



4 Sided
Pressed Bevel



Ultracoat
System



High density
≈900kg/m³



Impact
Resistant



Easy to
Clean



Slip
Resistant



Fire
Retardant



Water
Resistant



Wear
Resistant

Product Overview & Details

Dimension

10 x 195 x 1215 mm

Packing

20.5 sqft / 8 pcs / ctn
17.5 kg / ctn
60 ctns / pallet

Specification

AC4 Class

Surface

Embossed

Pressed Bevel



Thickness

 **10** mm

Dimension



Venus Ivory
CDF111



Faunus Glow
CDF112



Aurora Dawn
CDF113



Saturn Bronze
CDF114



Jupiter Shadow
CDF115



Diana Frost
CDF116



Minerva Ash
CDF117



Pluto Noir
CDF118

CDF Accessories – HDF Profile


CDFS



CDF Stair Board

Dimension: 1215 x 135 x 25 mm


HAP



HDF A Profile

Dimension: 2400 x 45 x 13 mm

HTP

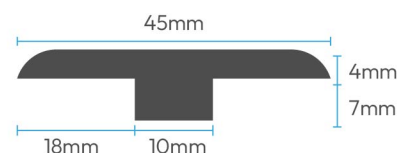

HDF T Profile

Dimension: 2400 x 45 x 11 mm



CDFS111

Venus Ivory



HAP111

Venus Ivory



HTP111

Venus Ivory



CDFS112

Faunus Glow



HAP112

Faunus Glow



HTP112

Faunus Glow



CDFS113

Aurora Dawn



HAP113

Aurora Dawn



HTP113

Aurora Dawn



CDFS114

Saturn Bronze



HAP114

Saturn Bronze



HTP114

Saturn Bronze



CDFS115

Jupiter Shadow



HAP115

Jupiter Shadow



HTP115

Jupiter Shadow



CDFS116

Diana Frost



HAP116

Diana Frost



HTP116

Diana Frost



CDFS117

Minerva Ash



HAP117

Minerva Ash



HTP117

Minerva Ash



CDFS118

Pluto Noir



HAP118

Pluto Noir



HTP118

Pluto Noir



CDF111



CDF112



CDF113



CDF114



CDF115



CDF116



CDF117



CDF118

Flooring Underlayment

Silence & Protect



EVA with Aluminium Foil

EVA2AF

Size / Dimension	Thickness	Coverage
1 m (w) X 20 m (l)	2 mm	215 ± sqft



PE FOAM with Aluminium Foil

F2AF

Size / Dimension	Thickness	Coverage
1 m (w) X 50 m (l)	2 mm	538 ± sqft

 Your Quality Assured		
Test Report		
Issue Date:	2020-05-27	Intertek Report No.: 200424905518 009
Test Items, Method and Results:		
NALSA LA 02-2013: Laminate flooring specifications and test Methods		
Test Items	Test Methods	Test Results
Chip Resistance	MD dry condition:	Static coefficient mean: 0.59
		Sliding coefficient mean: 0.41
	MD wet condition:	Static coefficient mean: 0.58
		Sliding coefficient mean: 0.57
	AWD dry condition:	Static coefficient mean: 0.57
		Sliding coefficient mean: 0.42
	AWD wet condition:	Static coefficient mean: 0.60
		Sliding coefficient mean: 0.58
	Note: 1. MD=Manufacturing direction, AWD=across-manufacturing direction.	