

5mm LVT Click Flooring




novafloor

 **CYBERFLOR**[®]
GUARDIAN OF FLOORING

High Performance Components

Vinyl click flooring provides exceptional dimensional stability and superior performance

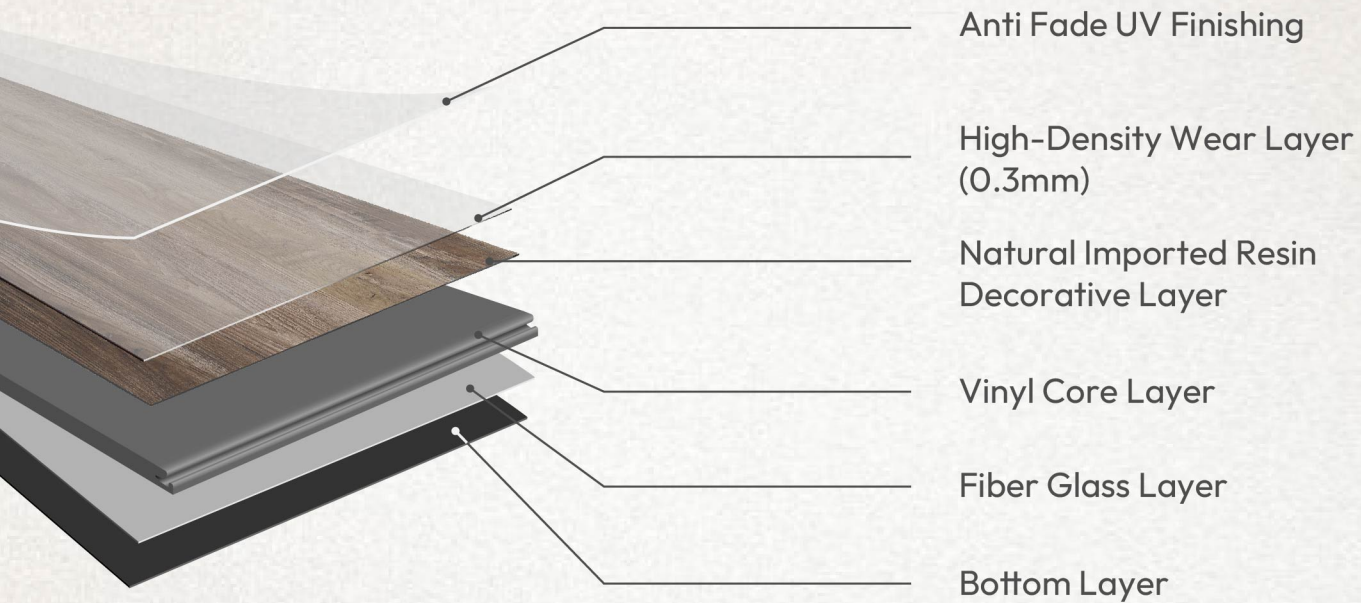

Certified by:



Features of LVT+ Flooring

Performance Highlights



Water
Resistant



Termite
Proof



Soundproof
Flooring



Advanced Click
Lock System



Low
Maintenance



No
Formaldehyde



Scratch
Resistant



Fire
Retardant



Pet
Friendly



Environmental
Protection

100%
VIRGIN

Virgin
Material

Product Overview & Details

Dimension

5 x 180 x 1220 mm

Wear Layer

0.3 mm

Micro Bevel




Packing

23.64 sqft / 10 pcs / ctn


Surface

UV Coating

Thickness



Dimesion

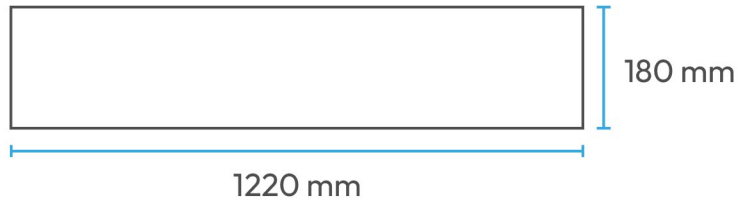

Grey Hem Brissago
NFVC501



Light Rosen Maple
NFVC502



Terra Hog Maple
NFVC503



Terra Fvo Beech
NFVC504



Terra Pine Nogal
NFVC506




Dark Savr Walnut
NFVC507



Grey Truf Ash
NFVC508



Grey Clio Oak
NFVC509




Grey Greb Noce
NFVC510




NFVC501



NFVC502

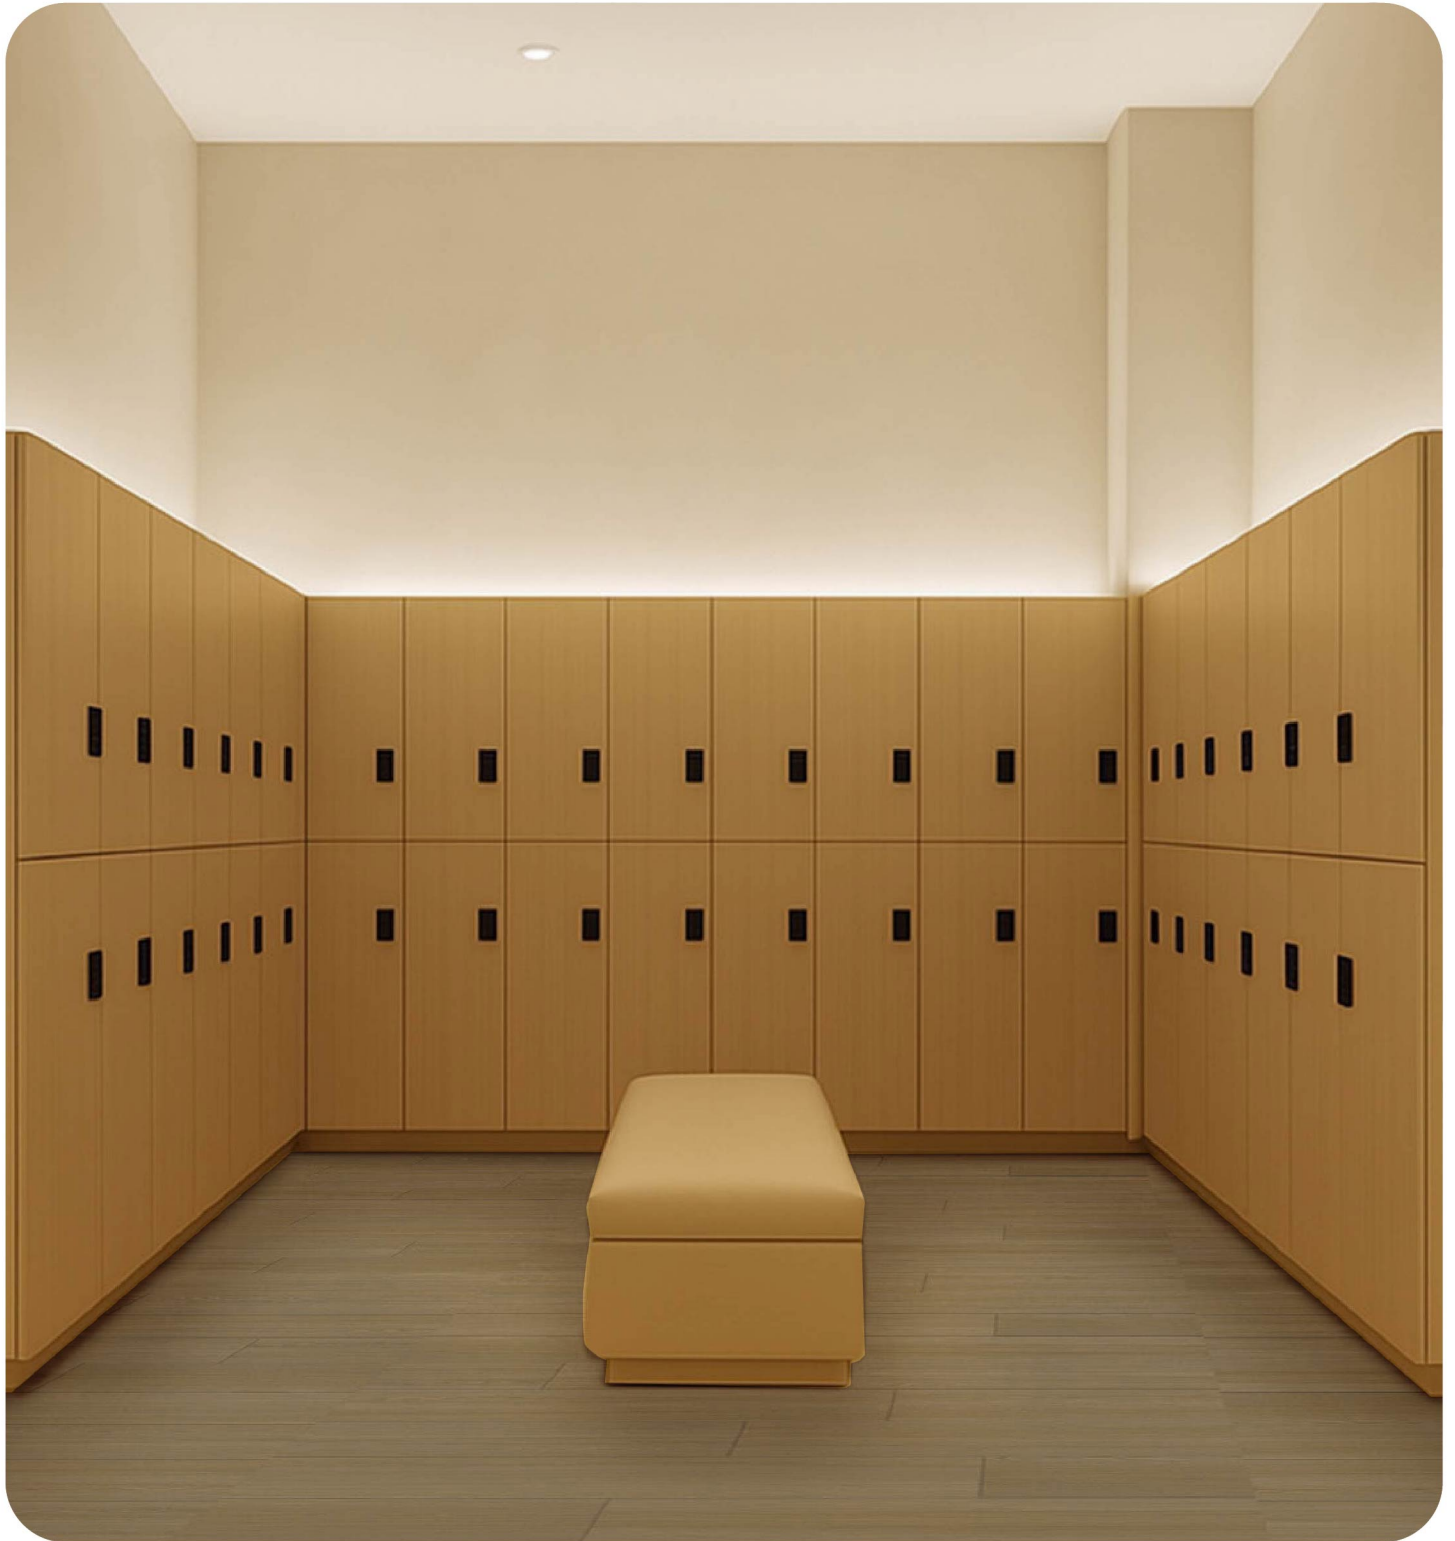

NFVC503

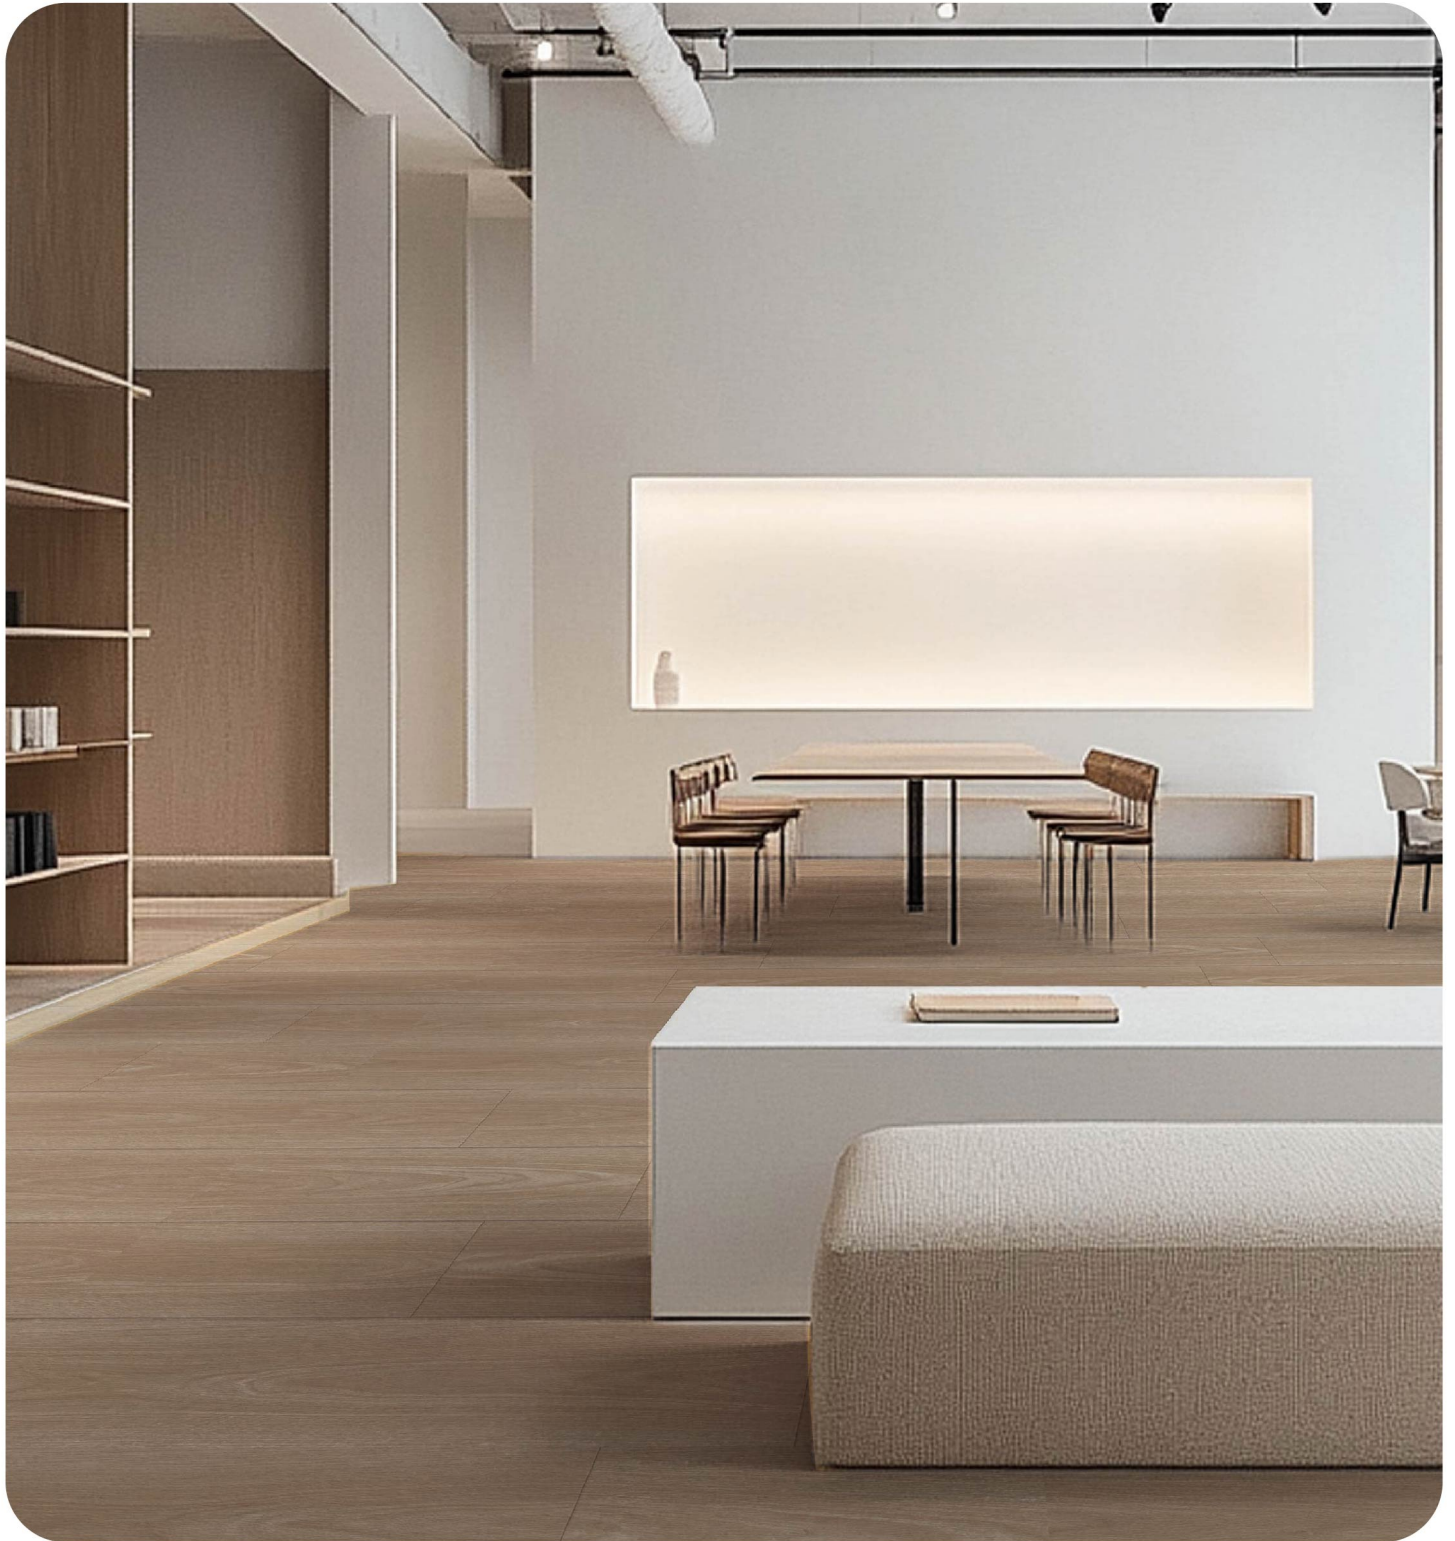

NFVC504




NFVC506




NFVC507



NFVC508

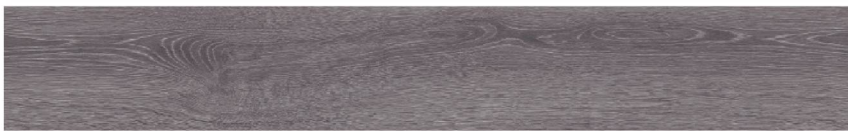

NFVC509

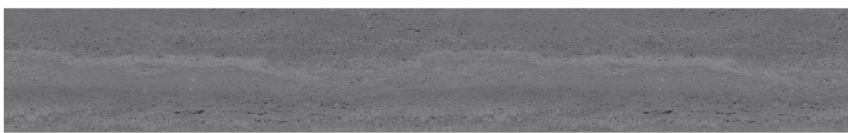

NFVC510

Product Specification

Dimensions : 180 x 1220 mm

Thickness : 5 mm

Wear Layer : 0.3 mm

Packaging : 10 pcs / 23.64 sqft

Technical Features

Material	Vinyl Click	
Surface Treatment	UV Coating (Two Coats)	
Click & Lock System	Unilin	
Packaging	23.64 sqft / 10 pcs per box	
Wear Resistant	Group T	
4 Side Edges	Micro Bevel	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	BIGBALL > 1000 mm
Reaction To Fire Behavior	ASTM E648 - 19a	CLASS 1
Slip Resistance	DIN 51130 - 2004	R10
Emission Of Formaldehyde	EN 717 - 2	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L
VOC Test sas	CDPH/EHLB Standard Method V1.2	PASS
Phthalate Test	EN 14372:2004	NOT DETECTABLE
Prohibited Heavy Metal	ICP - OES	PASS