


7.0mm SVT Wood Flooring



Supreme Collection

High

Performance Components

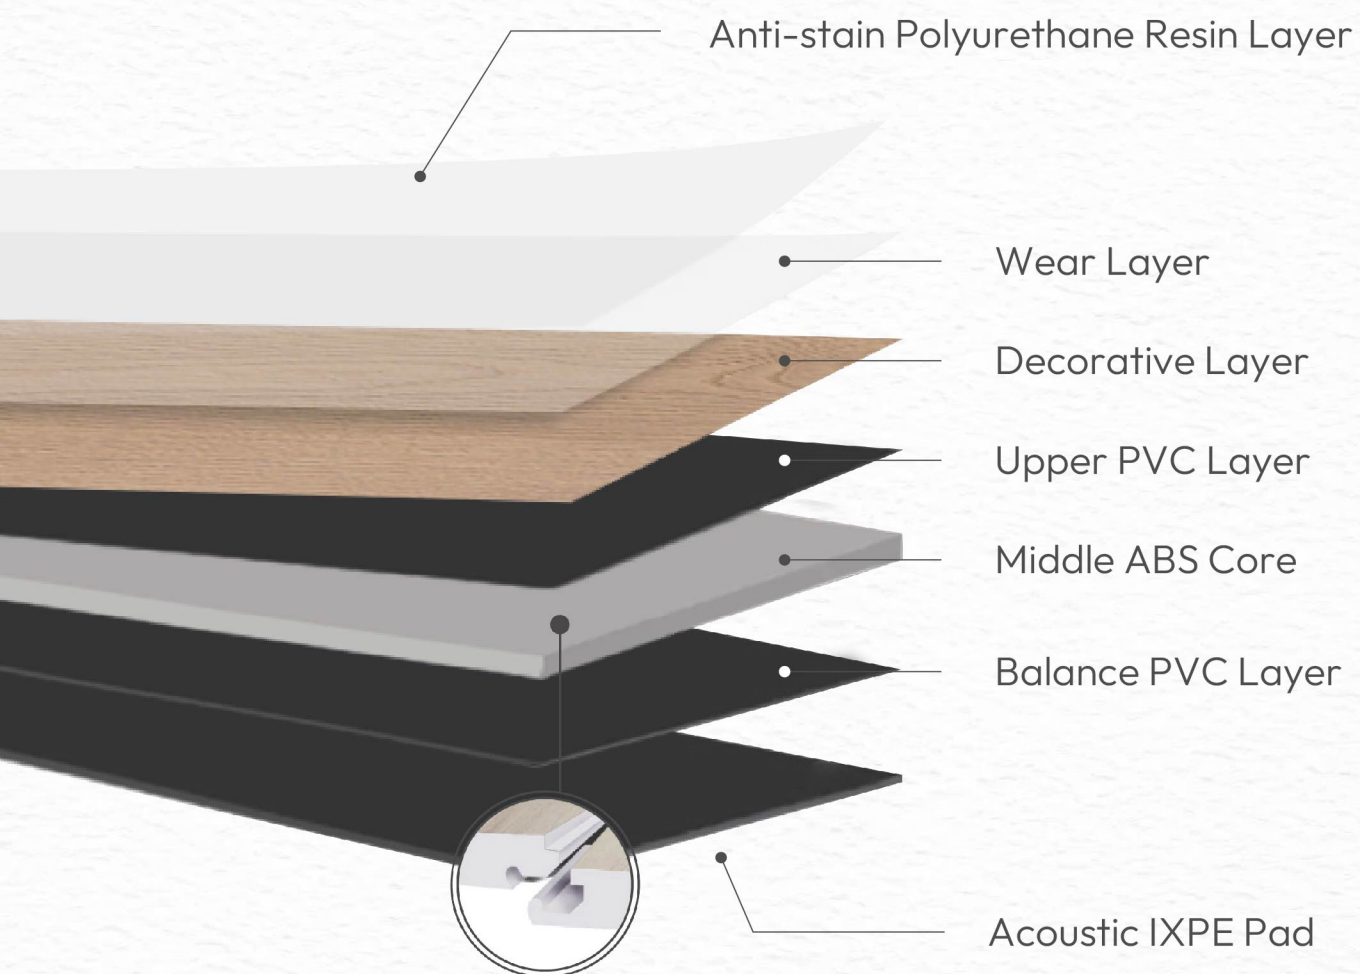

Click Locking System

Angle locking technology is profiled on long-edges of planks to facilitate a fast, floating-floor installation.

Features of SVT Flooring

Performance Highlights



Stain
Resistance



100%
Waterproof



Environment
Friendly



Scratch
Resistant



Anti
Termite



Slip
Resistant



Cigarette
Burn Resistance



Fire
Resistant



Zero
Formaldehyde



Easy
Installation



Fade
Resistance



Sound
Absorbing

Product Overview & Details

Dimension

7.0 x 182 x 1524 mm
(6.0mm + 1.0mm IXPE Padding)

Wear Layer

0.5 mm

Micro Bevel




Packing

20.9 sqft / 7 pcs / ctn
50 ctns / pallet

Surface

EIR

Dimension

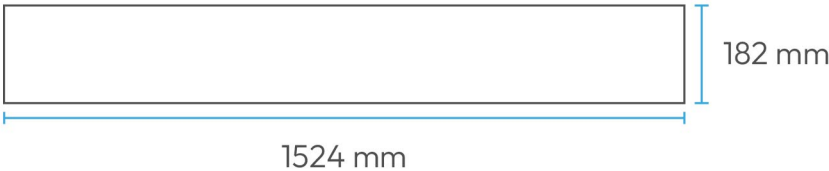

Imperial Oak
SVT1



Majestic Maple
SVT3



Royal Oak
SVT5



Golden Elm
SVT6



Regal Birch
SVT8



Highland Oak
SVT11



White Oak
SVT12



Artisan Oak
SVT13



SVT1



SVT3




SVT5



SVT6



SVT8

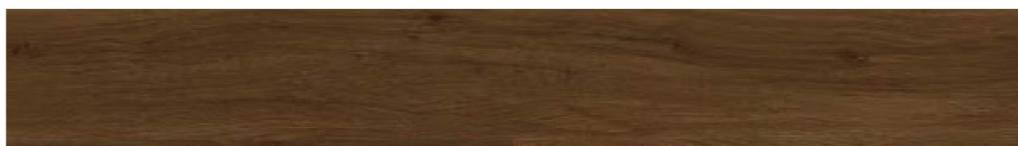

SVT11



SVT12



SVT13

Technical Date. SVT 7.0

Wear Layer : 0.5 mm

Packing : 7 pcs / 20.9 sqft

Characteristics	Standards	Result
Total mass per unit area	EN ISO 23997	9.75kg/m2
Squareness	EN ISO 24342	≤0.15mm
Straightness	EN ISO 24342	≤0.15mm
Peel Strength	EN ISO 24345	≥5.0kgf/cm
Residual Indentation	EN ISO 24343-1	≤0.20mm
Dimensional stability after exposure to heat	EN ISO 23999	≤0.05%
Initial curling	EN ISO 23999	-1.0mm≤n≤0.5mm
Curling after exposure to heat	EN ISO 23999	-1.0mm≤n≤0.5mm
Tension Strength	Internal	≥25kgf/5cm
Resistance to chemicals	EN ISO 26897	Pass
Colour fastness to light	EN ISO 105-B02	≥6
Wear Resistance	EN660-2	Pass
Toxic	EN71-3	ND
Fire Classification	EN13501-1 GB8624	Bfl-S1 B1
Slip Resistance	EN13893 DIN51130	D ≥R9
Usage Classification	EN ISO 10874	23,33,42
Impact Sound Reduction	ISO 10140-3 ISO717-2	21db





COMING SOON

STAY TUNED

7mm SVT Flooring

JULY 2026