


3.6mm LVT Click Flooring



novafloor



High Performance Components

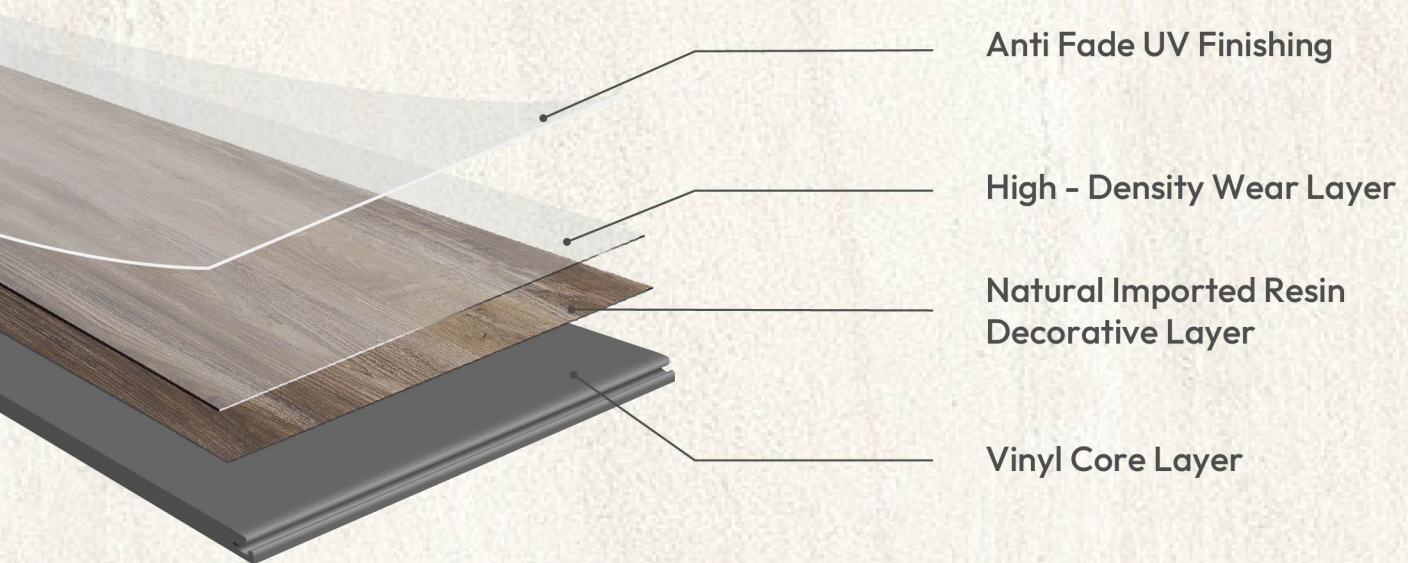

Features of LVT+ Flooring

Performance Highlights



Water
Resistant



Termite
Proof



Soundproof
Flooring



Advanced Click
Lock System



Low
Maintenance



No
Formaldehyde



Scratch
Resistant



Fire
Retardant



Pet
Friendly



Environmental
Protection

100%
VIRGIN

Virgin
Material

Product Overview & Details


Dimension

3.6 x 184 x 914 mm

Wear Layer

0.1 mm


Thickness

 3.6 mm

Packing

28.96 sqft / 16 pcs / ctn

Dimension

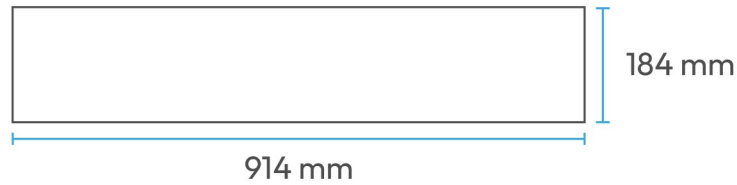

Light Varen Oak
NFVC361



Terra Soren Oak
NFVC362



Terra Elvo Teak
NFVC363



Terra Aros Oak
NFVC364



Light Oren Oak
NFVC365



Dark Zern Walnut
NFVC366



Terra Nolv Walnut
NFVC367



NFVC361




NFVC362




NFVC363



NFVC364

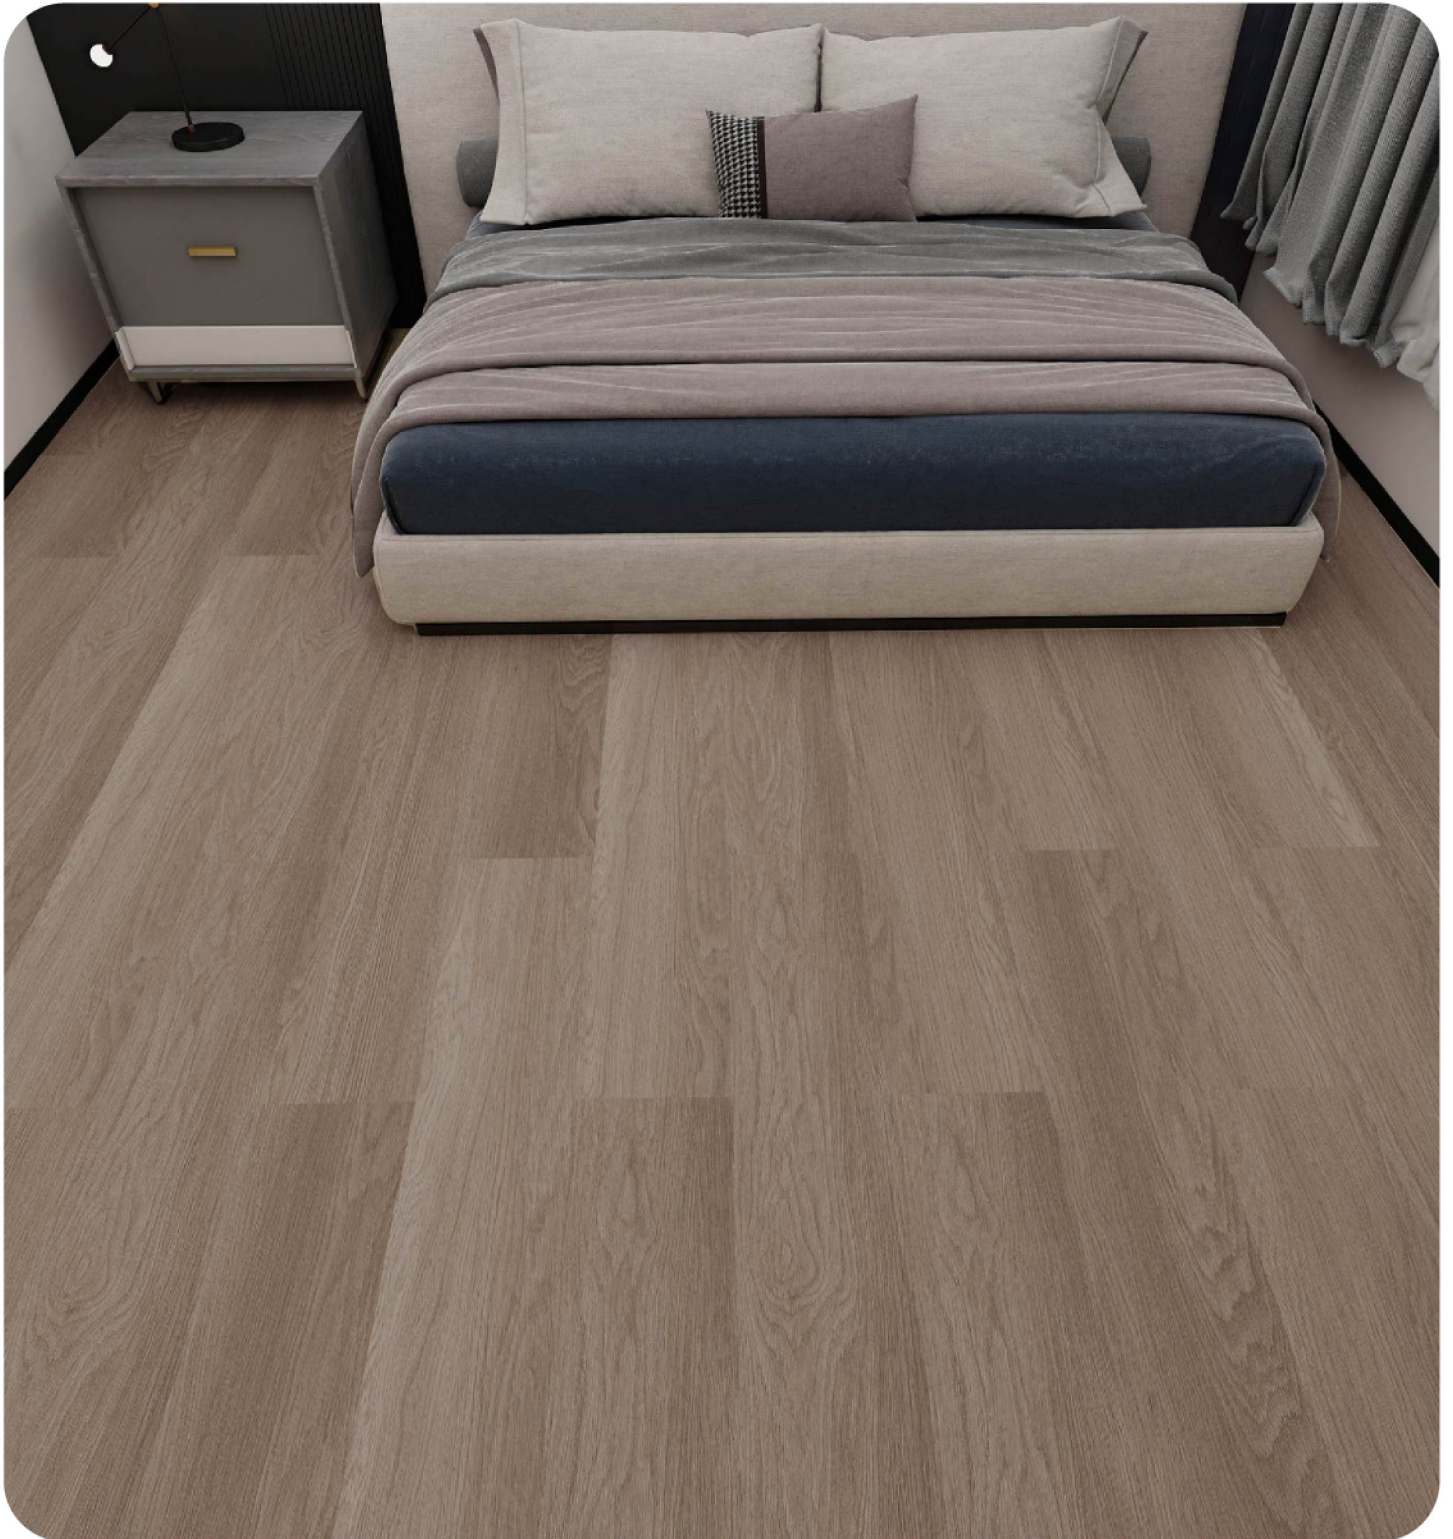

NFVC365

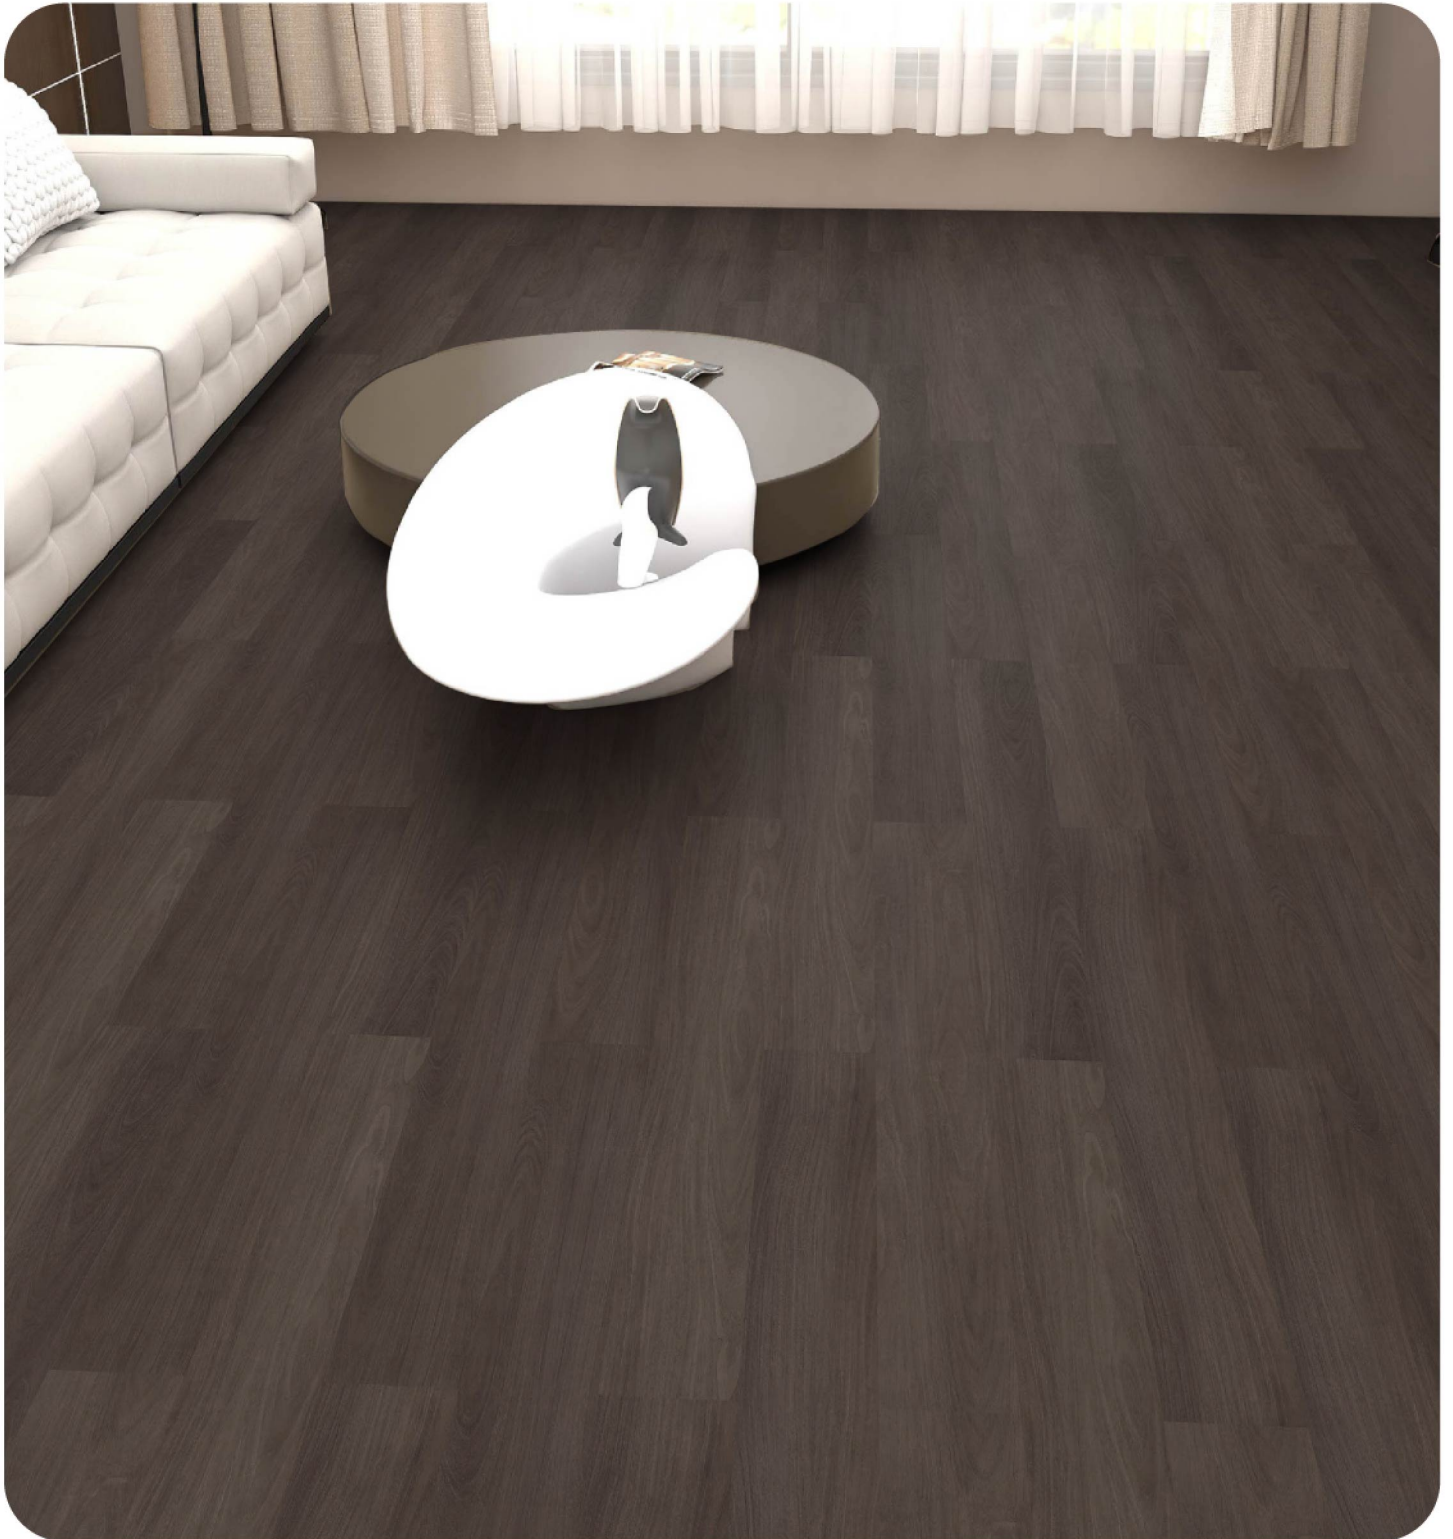

NFVC366



NFVC367

Product Specification

Dimensions : 184 x 914 mm

Thickness : 3.6 mm

Wear Layer : 0.1 mm

Packaging : 16 pcs / 28.96 sqft

Technical Features

Material	100% Virgin Material	
Click & Lock System	Unilin	
Heat Warping (80°C)	≤ 1.0mm	
Dimensional Stability	≤ 0.15%	
Peel-off Strangth	≥ 50N / 50mm	
Gapping	≤ 0.15mm	
Height Difference	≤ 0.15mm	
Glossiness	± 1.5°	
Residual Indentation	≤ 0.1mm	
Total Lead in Substrate	ASTM F963-17 (Clause 4.3.5)	Not Detectable
Heavy Metals in Substrate	ASTM F963-17 (Clause 4.3.5)	Not Detectable
Phthalates	EN 14372:2004	Not Detectable
VOC Emission	CDPH / EHLB Standard Method V1.2	PASS