


4.6mm SPC Flooring



novafloor



High Performance Components

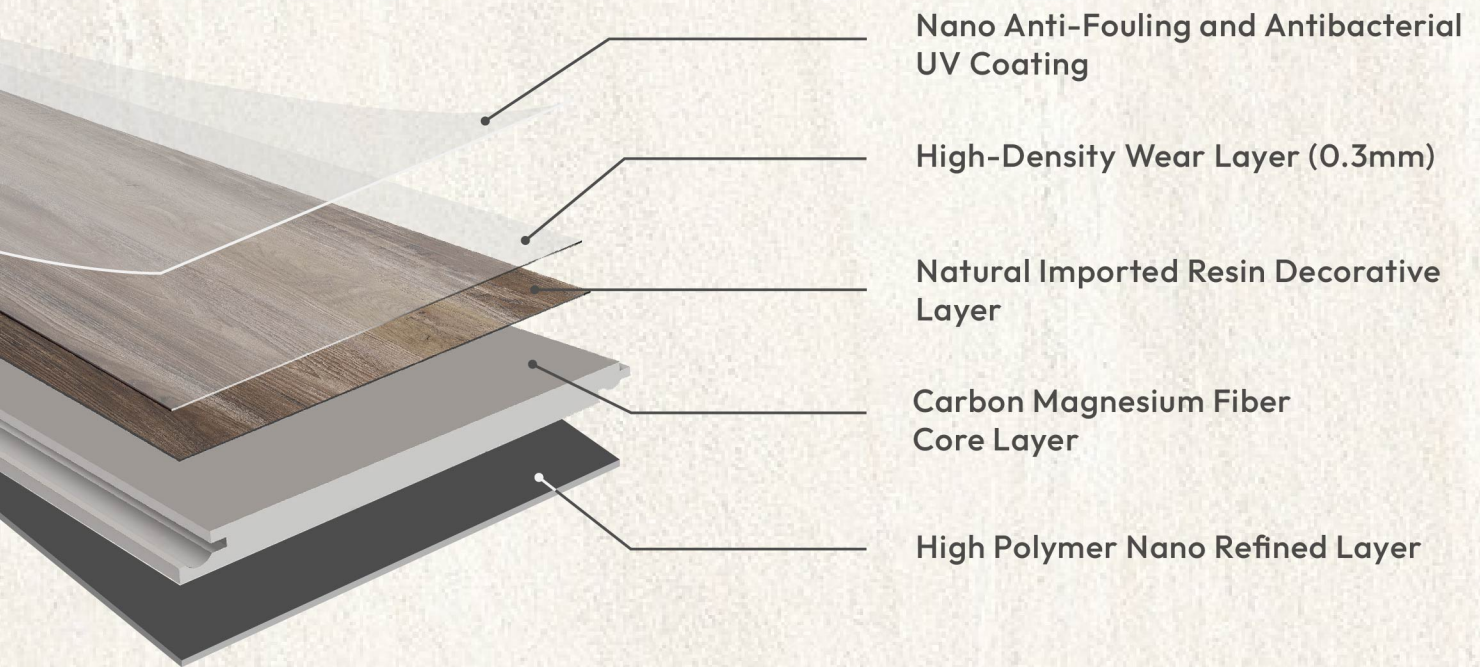

Features of SPC Flooring

Performance Highlights

Nanotechnology



Anti Bacterial



Resilience Enhancement



Termite
Resistant



Fire
Retardant



Eco
Friendly



Scratch
Resistant



Water
Resistant



Pet
Friendly



Low
Maintenance



Soundproof
Flooring

100%
VIRGIN

Virgin
Material



Advanced Click
Lock System



No
Formaldehyde

Product Overview & Details

Dimension

4.6 x 184 x 1220 mm

Wear Layer

0.3 mm

Micro Bevel



Packing

24.16 sqft / 10 pcs / ctn


Surface

UV Coating

Thickness

4.6 mm

Dimesion

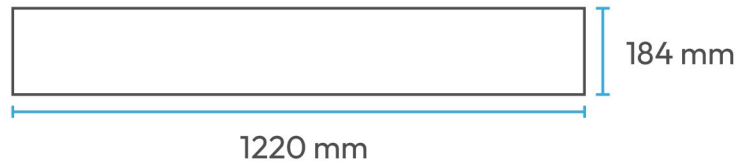

Grey Hem Brissago
NFS461



Light Rosen Maple
NFS462



Terra Hog Maple
NFS463



Terra Fvo Beech
NFS464



Terra Pine Nogal
NFS466



Dark Savr Walnut
NFS467




Grey Truf Ash
NFS468



Grey Clio Oak
NFS469

Accessories

4.6mm Flush Nosing

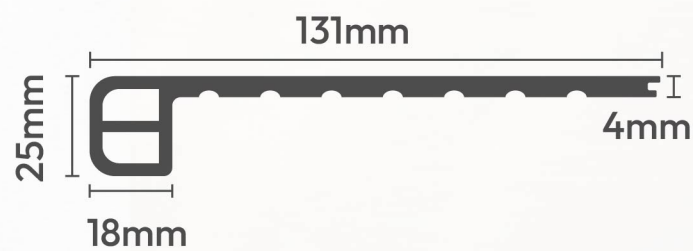

FN46

Dimension: 131 x 25 x 2400mm



FN461

Grey Hem Brissago



FN462

Light Rosen Maple



FN463

Terra Hog Maple



FN464

Terra Fvo Beech



FN466

Terra Pine Nogal



FN467

Dark Savr Walnut



FN468

Grey Truf Ash



FN469

Grey Clio Oak




NFS461



NFS462



NFS463

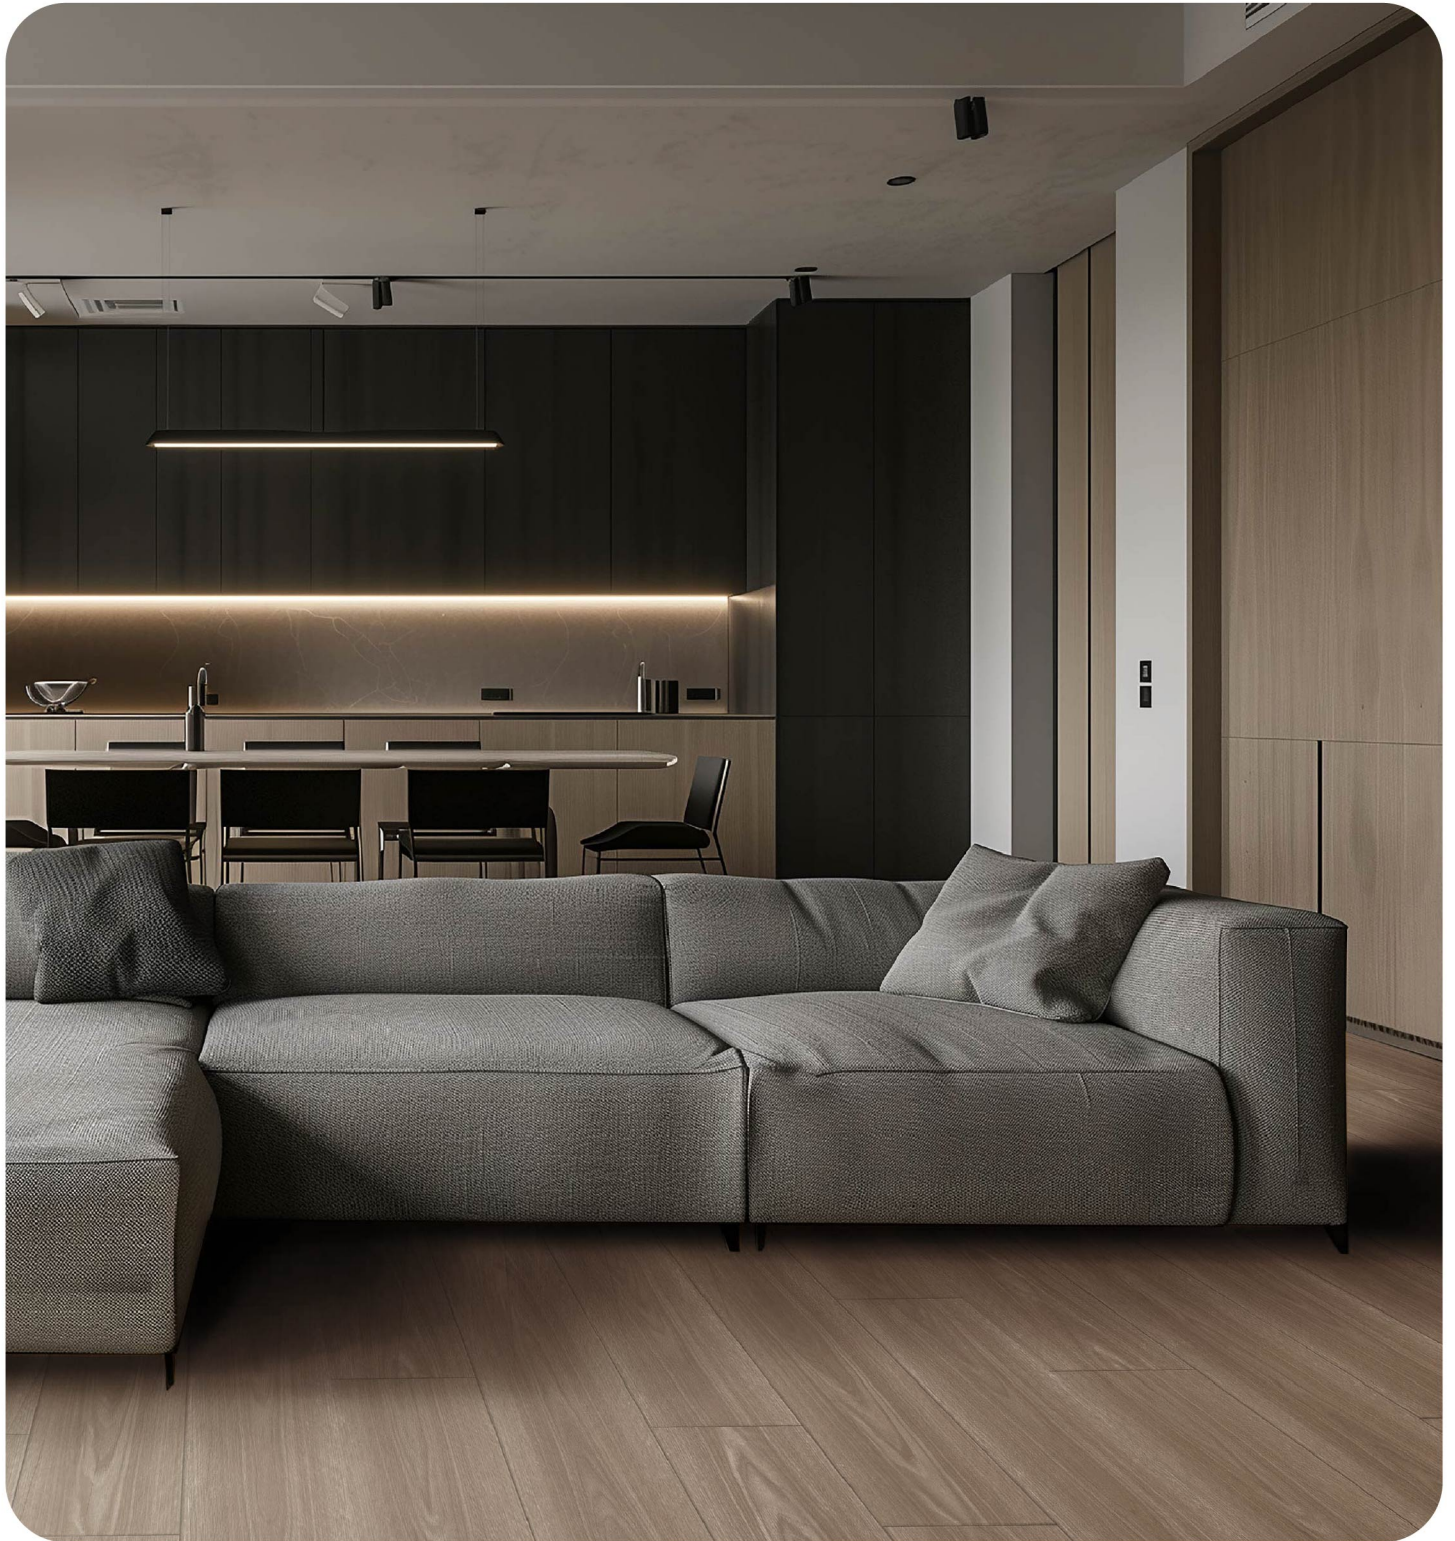

NFS464




NFS466



NFS467



NFS468

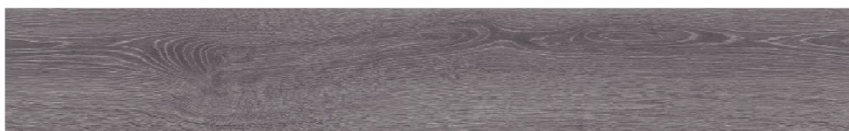

NFS469

Product Specification

Dimensions : 184 x 1220 mm**Thickness :** 4.6 mm**Wear Layer :** 0.3 mm**Packaging :** 10 pcs / 24.16 sqft

Technical Features

Material	Nanospc	
Click & Lock System	Unilin	
Wear Resistant	Group T	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	100 kg, No Damage
Reaction To Fire Behavior	ASTM D635:2022	PASS
Slip Resistance	DIN 51130 - 2014	R12
Emission Of Formaldehyde	ISO 14184-1	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L