


8+2mm LAMISPC Flooring



novafloor



High Performance Components

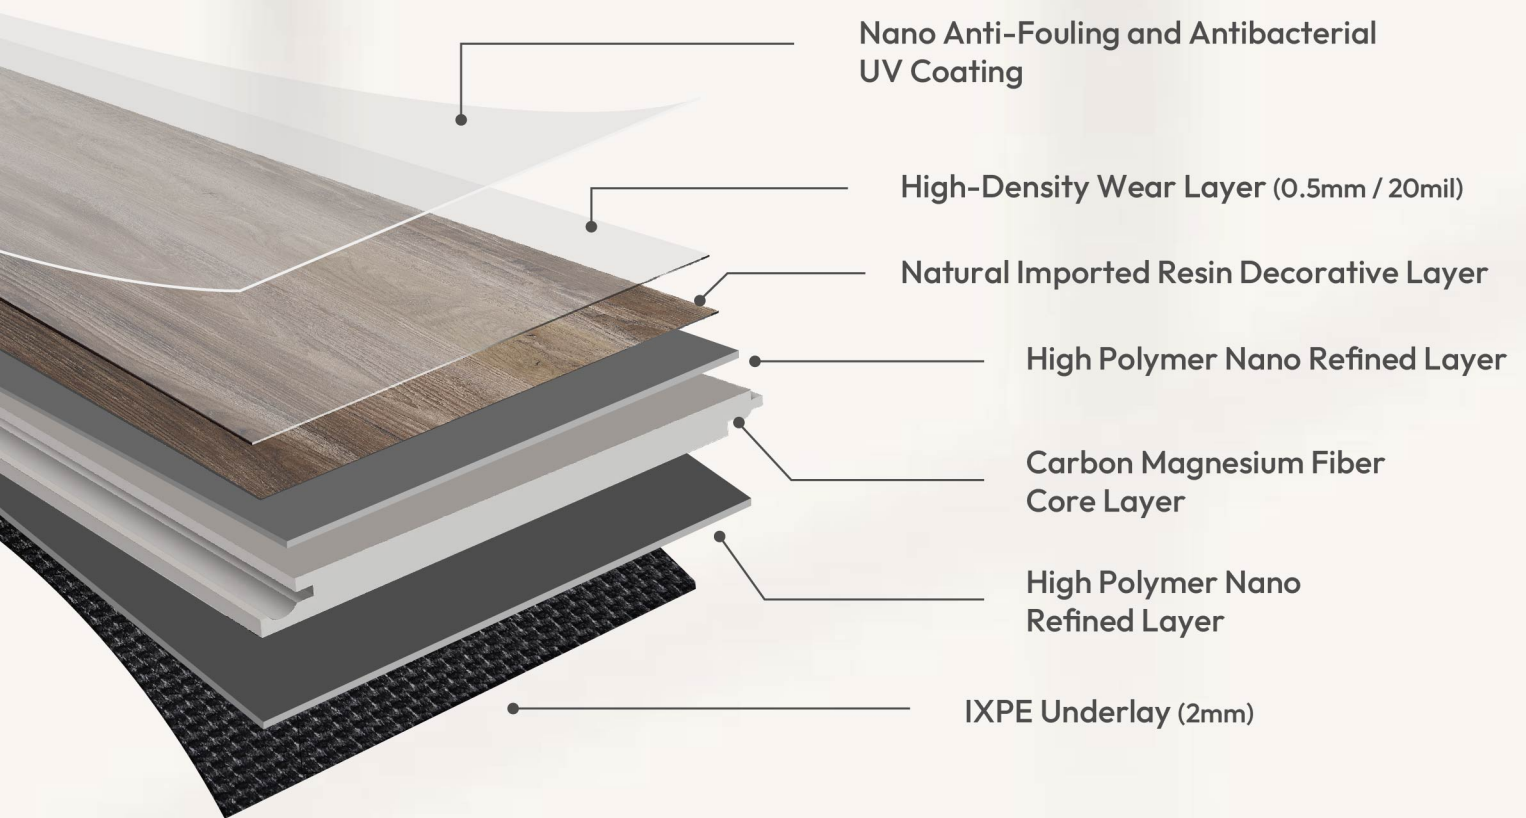

Features of SPC Flooring

Performance Highlights

Nanotechnology



Anti Bacterial



Resilience Enhancement



Termite
Resistant



Fire
Retardant



Eco
Friendly



Scratch
Resistant



Water
Resistant



Pet
Friendly



Low
Maintenance



Soundproof
Flooring

100%
VIRGIN

Virgin
Material



Advanced Click
Lock System



No
Formaldehyde

Product Overview & Details

Dimension

8+2 x 230 x 1500 mm

Wear Layer

0.5 mm

Micro Bevel




Packing

14.85 sqft / 4 pcs / ctn


Surface

UV Coating

Thickness



Dimesion

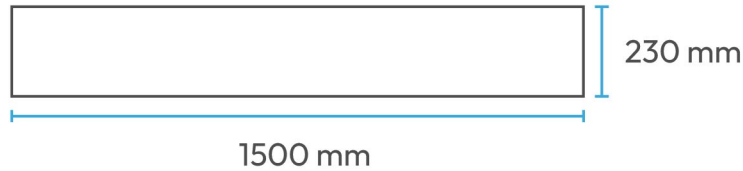

Terra Jek Teak
NFLS101



Terra Wiril Oak
NFLS102



Terra Rvo Oak
NFLS103



Terra Cleo Elm
NFLS104




Terra Xpel Oak
NFLS105



Terra Vilf Walnut
NFLS106

Accessories

10mm Flush Nosing

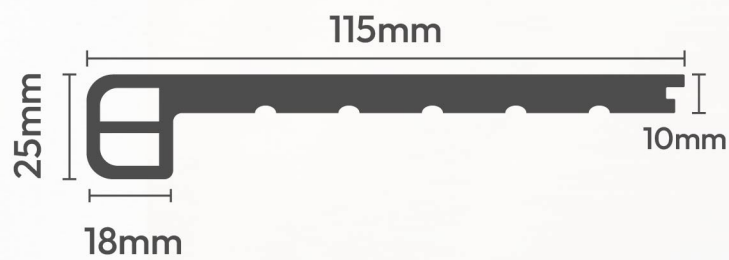

FN10

Dimension: 115 x 25 x 2400mm



FN101
Terra Jek Teak



FN102
Terra Wirl Oak



FN103
Terra Rvo Oak



FN104
Terra Cleo Elm



FN105
Terra Xpel Oak



FN106
Terra Vlif Walnut



NFLS101



NFLS102



NFLS103



NFLS104



NFLS105



NFLS106

Product Specification

Dimensions : 230 x 1500 mm

Thickness : 8+2 mm

Wear Layer : 0.5 mm

Packaging : 4 pcs / 14.85 sqft

Technical Features

Material	Lamispc	
Click & Lock System	Valinge 2G Click	
Wear Resistant	Group T	
Martindale Abrasion Test	EN 16094	MSR - B2
Castor Wheel Resistant	BS EN ISO 4918:2021	PASS
Ball Drop / Impact Resistant	BS EN 13329: 2016+A2:2021 Annex H	100 kg, No Damage
Reaction To Fire Behavior	ASTM D635:2022	PASS
Slip Resistance	DIN 51130 - 2014	R12
Emission Of Formaldehyde	ISO 14184-1	NOT DETECTED
Residual Vinyl Chloride Monomer	EN ISO 6401 - 2008	< 0.5 MG / L
VOC Test	GB/T 34675-2017	PASS
Phthalate Test	EN 14372	PASS
Prohibited Heavy Metal	ICP - OES	PASS